

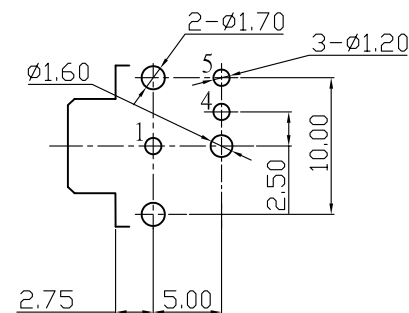

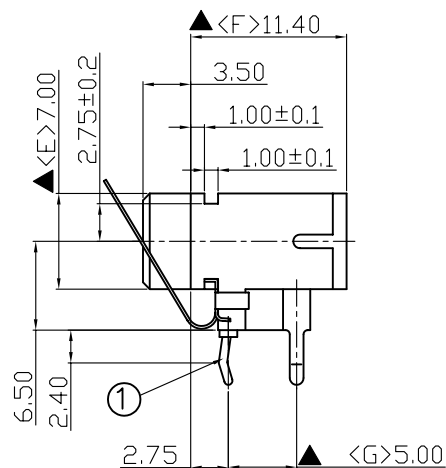
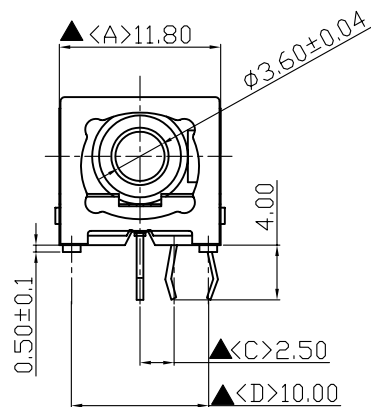





Pin Hole Layout
(Jack Bottom View)

6.	Cover	PBT	1	577C Green Color
5.	Housing	PBT	1	577C Green Color
4.	Panel Ground	0.20T Stainless Steel	1	
3.	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Break Terminal	0.40T Bronze	1	Silver Plated
1.	Earth Terminal	0.50T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

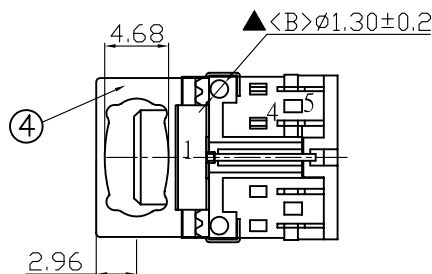

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

10.10.2011

PART NAME: 3.5ø PHONE JACK

PART NUMBER: SCJ362P00YS2G04G

VERSION:2.0

SPECIFICATIONS:


Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage : AC 500V for one minute
Remark: ▲ The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1