
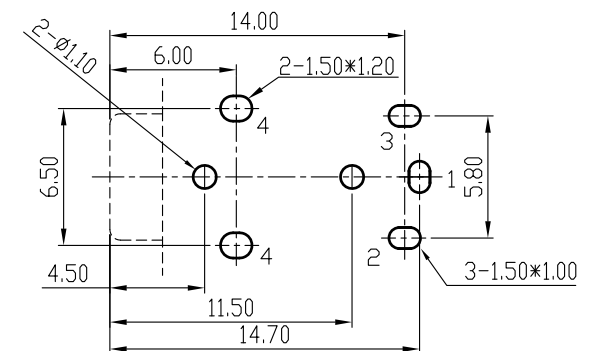

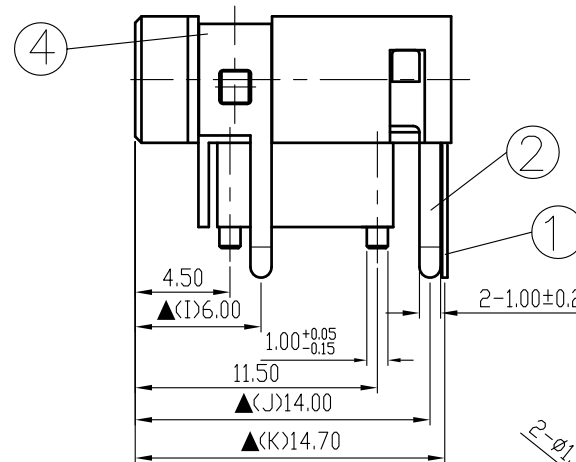
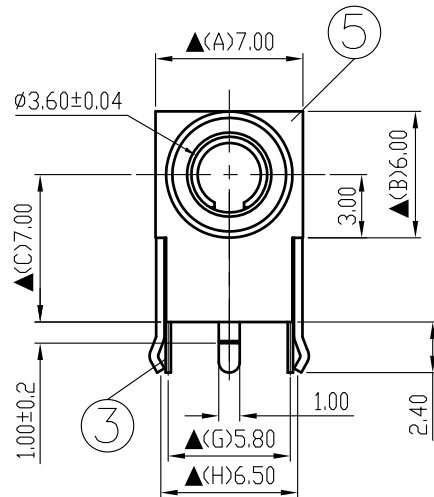


SCHEMATIC	
MODEL NO	L

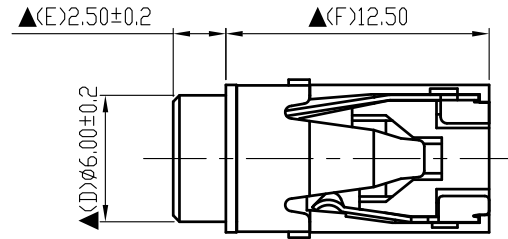

Pin Hole Layout
(Jack Bottom View)

For Reference
僅供參考

RoHS&SVHC
Compliant

5	Housing	PBT+15%	1	Black Color
4	Break Terminal	0.4T Phosphor Bronze	1	Silver Plated
3	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
2	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
1	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
12.21.2021	王平華			

PART NAME : 3.5φ PHONE JACK

PART NUMBER: SCJ372P00LS0B00G

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension