

1 2 3 4 5 6 7

A

Schematic

1

2

3

4





MODEL NO

L

B

C

D

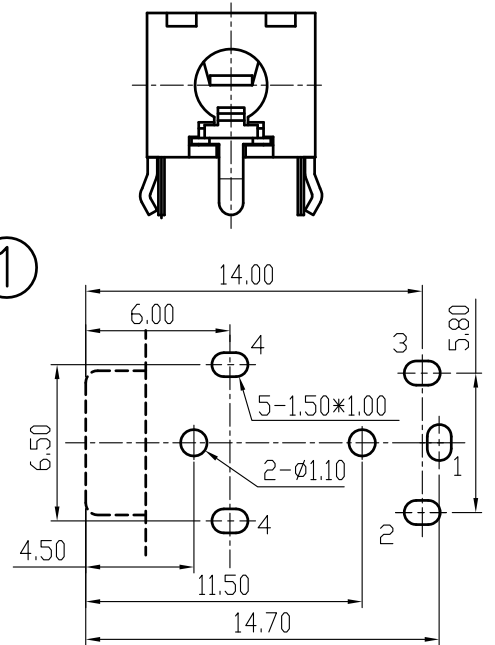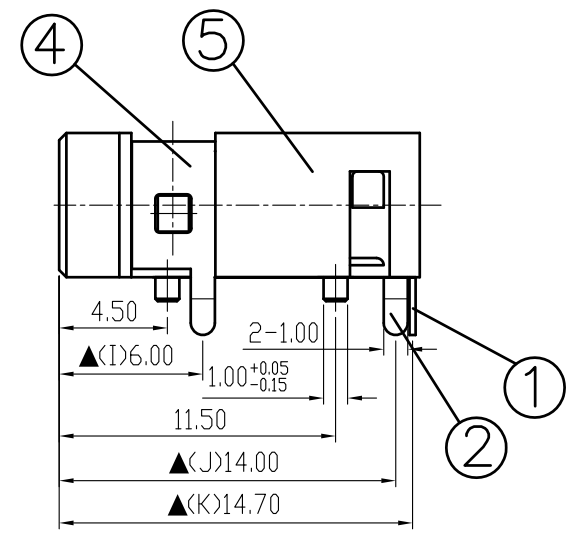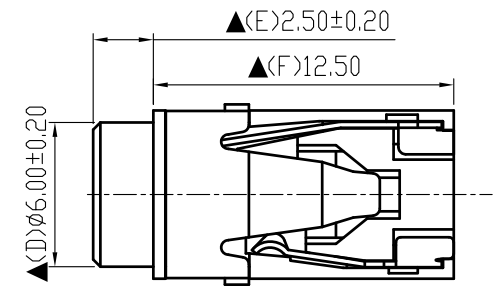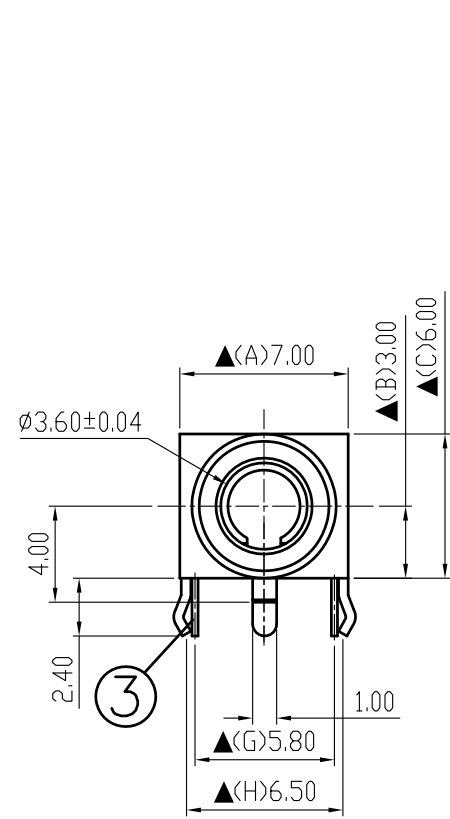

5	Housing	PBT+15%	1	Black Color
4	Break Terminal	0.4T Phosphor Bronze	1	Silver Plated
3	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
2	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
1	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO	Description	Material	Q'TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	12.21.2021	王平華			

PART NAME : 3.5Ø PHONE JACK	PART NUMBER: SCJ373P00LS0B00G	VERSION: 9.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm 	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant

1 2 3 4 5 6 7

A

B

C

D

E