

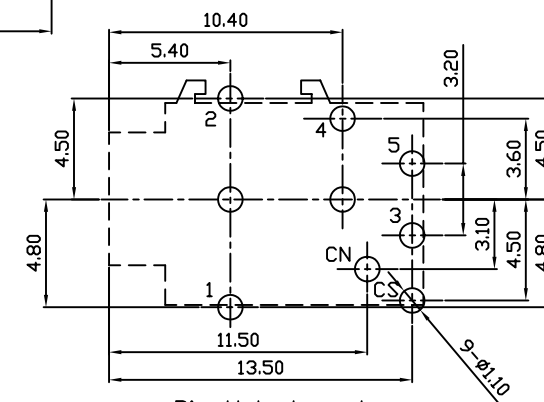

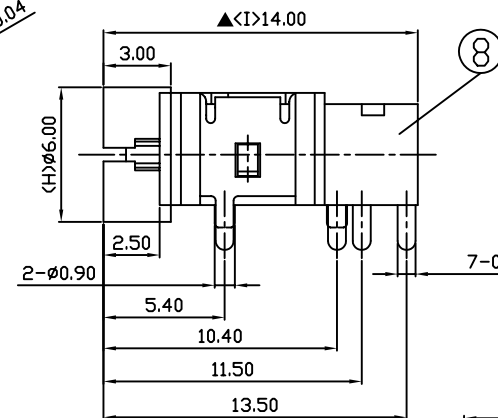
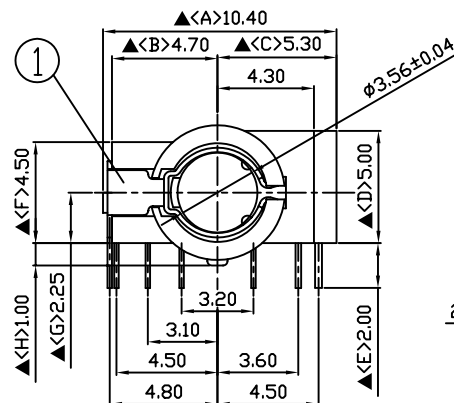


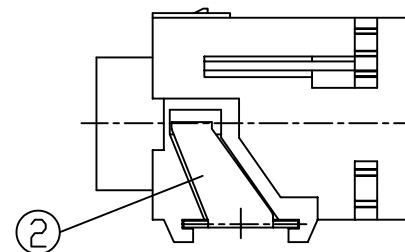

Pin Hole Layout
<Jack Bottom View>

8	Housing	PBT+15%G	1	Black Color
7	Shunt Terminal B	0.2T Phosphor Bronze	1	Gold Plated
6	Shunt Terminal A	0.2T Phosphor Bronze	1	Gold Plated
5	Tip Spring	0.25T Brass	1	Gold Plated
4	Break Terminal B	0.25T Phosphor Bronze	1	Gold Plated
3	Break Terminal A	0.2T Phosphor Bronze	1	Gold Plated
2	Ring Spring	0.3T Phosphor Bronze	1	Gold Plated
1	Earth Terminal	0.2T Phosphor Bronze	1	Gold Plated
NO	Descricion	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.06.2012				

PART NAME : 3.5φ PHONE JACK

PART NUMBER : SCJ376R7GAG0B00G

VERSION:3.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension