

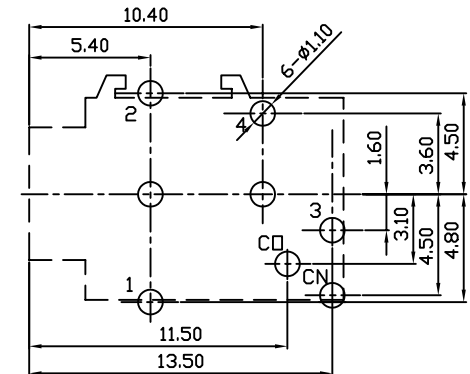
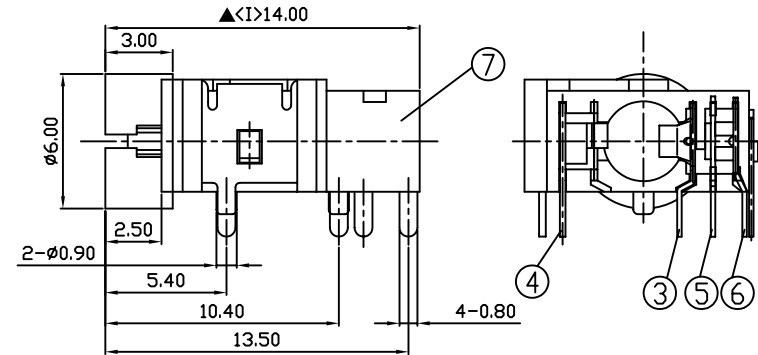
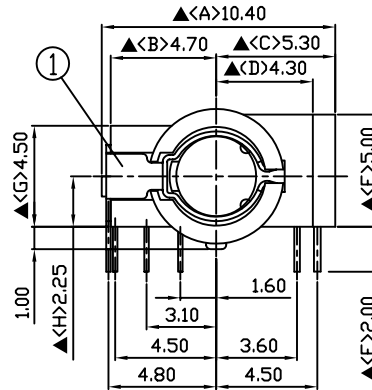
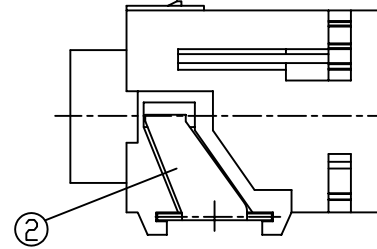




Pin Hole Layout
<Jack Bottom View>

7	Housing	PBT+15%G	1	Black Color
6	Break Terminal D	0.2T Phosphor Bronze	1	Silver Plated
5	Break Terminal C	0.2T Phosphor Bronze	1	Silver Plated
4	Break Terminal B	0.25T Phosphor Bronze	1	Silver Plated
3	Break Terminal A	0.2T Phosphor Bronze	1	Silver Plated
2	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1	Earth Terminal	0.2T Phosphor Bronze	1	Gold Plated
NO	Description	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.06.2012				

PART NAME : 3.5φ PHONE JACK

PART NUMBER : SCJ376R7GDG0B00G

VERSION:3.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考