

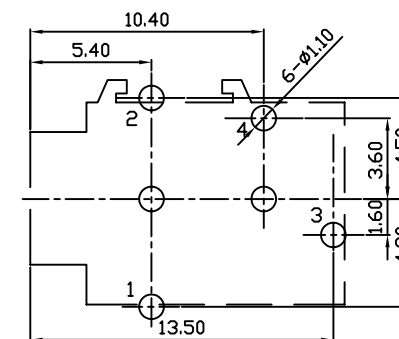

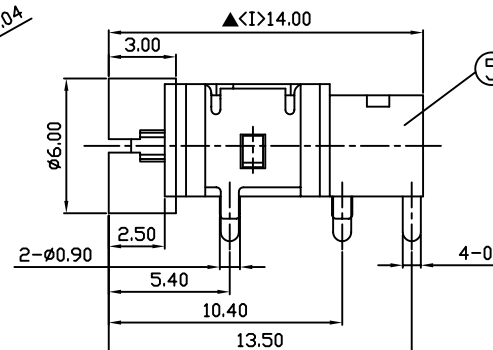


Schematic	
MODEL NO	F

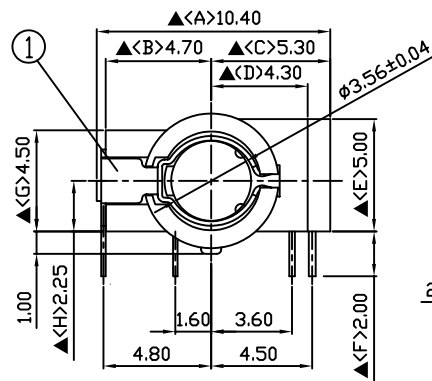

5.	Housing	PBT+15%G	1	Black Color
4.	Break Terminal B	0.25T Phosphor Bronze	1	Silver Plated
3.	Break Terminal A	0.2T Phosphor Bronze	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.2T Phosphor Bronze	1	Gold Plated
NO.	Description	Material	Q'TY	Finish

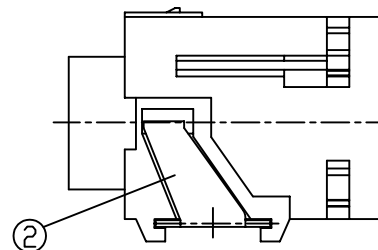

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.06.2012				


PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER : SCJ376R7GFG0B00G

VERSION:3.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

Pin Hole Layout
<Jack Bottom View>

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension