
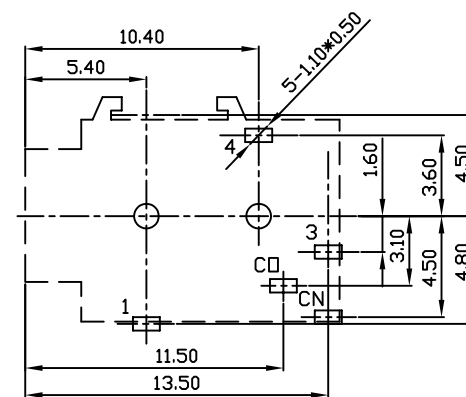

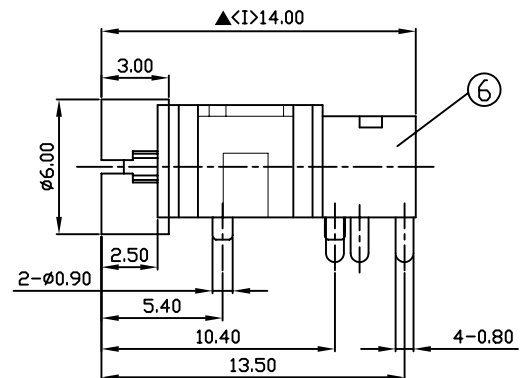
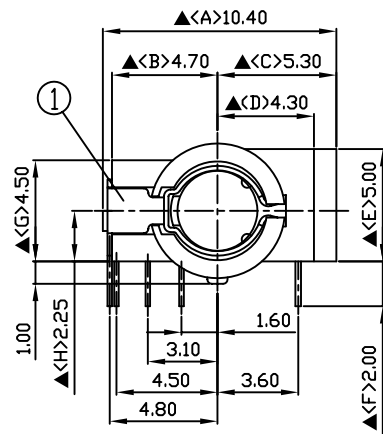




Pin Hole Layout
<Jack Bottom View>

6.		PBT+15%G	1	Black Color
5.	Break Terminal D	0.2T Phosphor Bronze	1	Silver Plated
4.	Break Terminal C	0.2T Phosphor Bronze	1	Silver Plated
3.	Break Terminal B	0.25T Phosphor Bronze	1	Silver Plated
2.	Break Terminal A	0.2T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.2T Phosphor Bronze	1	Gold Plated
	Description	Material	Q'TY	Finish

	DATE				DWN	CHKD	APVD	MANAGER
	01.06.2012							

PART NAME : 3.5Ø PHONE JACK		PART NUMBER : SCJ376R7GRS0B00G			VERSION:3.0		
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED				UNIT:mm		SCALE:1/1	

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考