


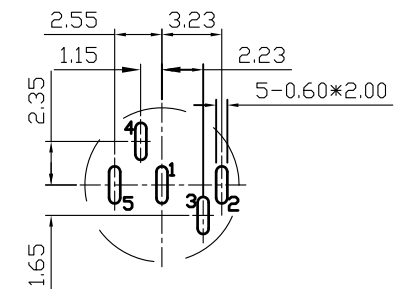



SCHEMATIC	
MODEL NO	U

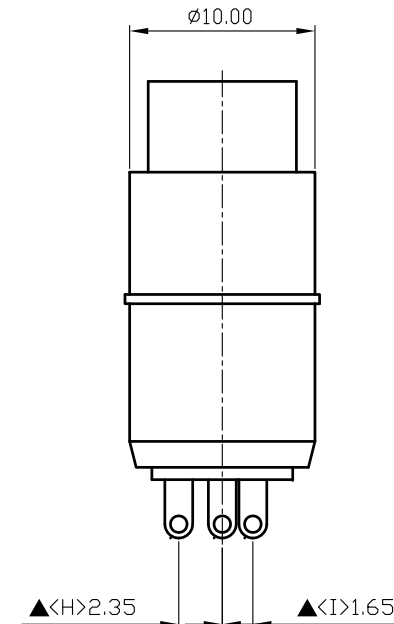

Pin Hole Layout
(Jack Bottom View)

8	Metal Shell	Low Lead Brass Rod	1	Nickel Plated
7	Housing	PBT+30%	1	Black Color
6	Cover	PBT+30%	1	Black Color
5	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
4	Break Terminal	0.3T Brass	1	Silver Plated
3	Break Terminal	0.3T Brass	1	Silver Plated
2	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1	Earch Terminal	0.3T Brass	1	Silver Plated
NO	Descricption	Material	Q'TY	Finish

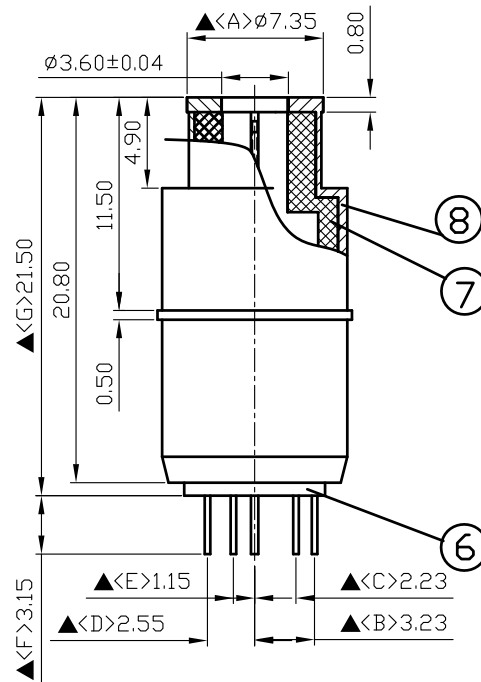

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.23.2021	王平華			


PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER: SCJ391M0NUS0B00L

VERSION:1.0

TOLERANCE: $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance :30m Ω max
Insulation Resistance :100M Ω min.at DC500V
Dielectric Withstand Voltage:AC 500V for one minute
Remark:▲:The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant