

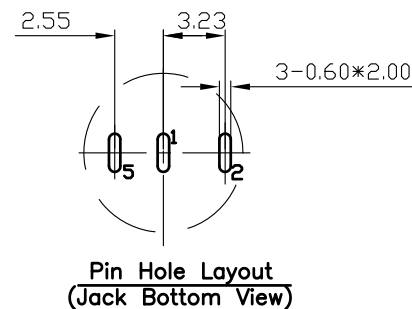

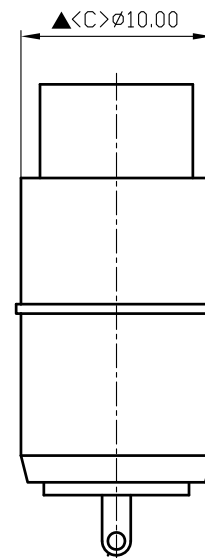


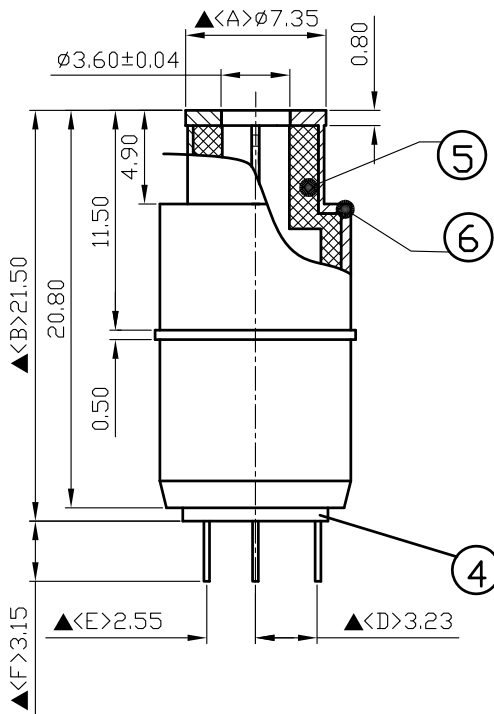

6.	Metal Shell	Low Lead Brass Rod	1	Nickel Plated
5.	Housing	PBT+30%	1	Black Color
4.	Cover	PBT+30%	1	Black Color
3.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earch Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.03.2021	王平華			

PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER: SCJ391M0NXS0B00L

VERSION: 1.0

TOLERANCE: $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : $30\text{m}\Omega$ max
 Insulation Resistance : $100\text{M}\Omega$ min. at DC500V
 Dielectric Withstand Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant