





SCHEMATIC	
MODEL NO	Z

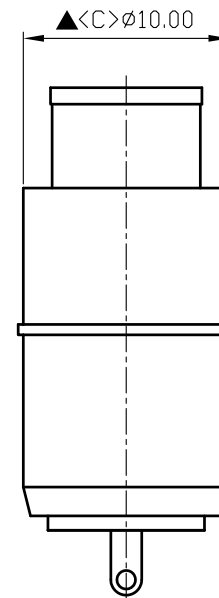

Pin Hole Layout
(Jack Bottom View)

5.	Metal Shell	Low Lead Brass Rod	1	Nickel Plated
4.	Housing	PBT+30%	1	Black Color
3.	Cover	PBT+30%	1	Black Color
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earch Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

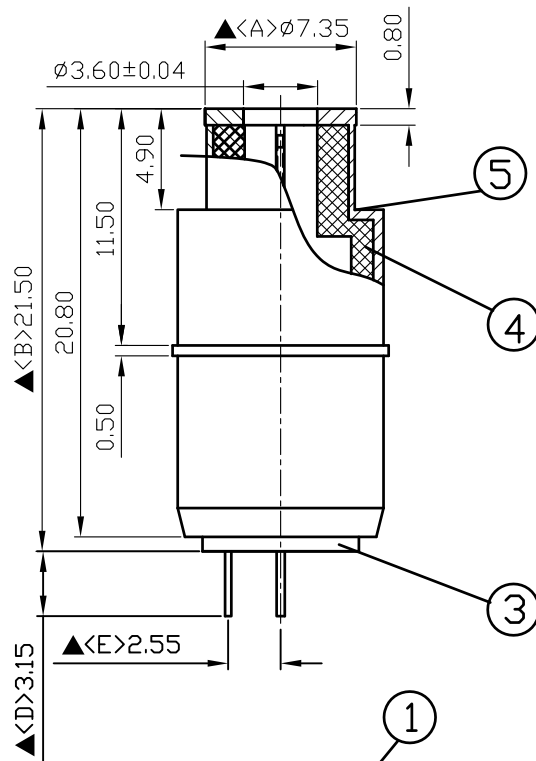

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.03.2021	王平華			

PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER: SCJ391MONZSOB00L

VERSION:2.0

TOLERANCE: $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:

Contact Resistance : $30\text{m}\Omega$ max
Insulation Resistance : $100\text{M}\Omega$ min.at DC500V
Dielectric Withstand Voltage: AC 500V for one minute
Remark: Δ : The Most Important Dimension