

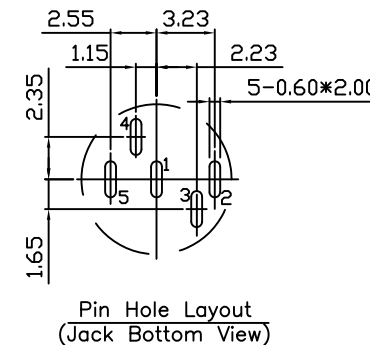

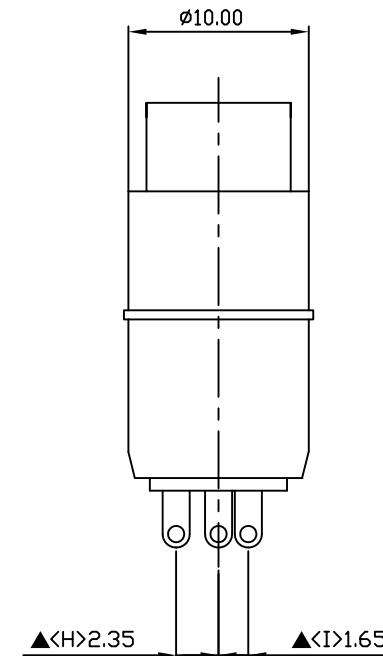


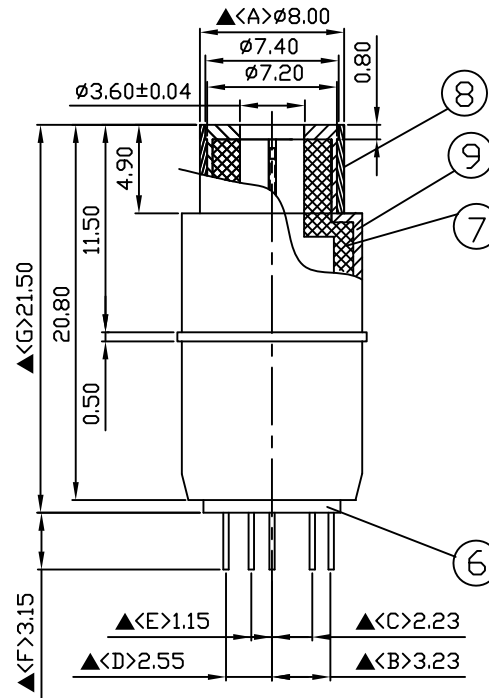

9	Metal Shell	Low Lead Brass Rod	1	Nickel Plated
8	Bushing	PA66	1	Black Color
7	Housing	PBT+30%	1	Black Color
6	Cover	PBT+30%	1	Black Color
5	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
4	Break Terminal	0.3T Brass	1	Silver Plated
3	Break Terminal	0.3T Brass	1	Silver Plated
2	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1	Earch Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	QTY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.20.2021	王平華			

PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER: SCJ391M7NUS0BB0L

VERSION: 1.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant