
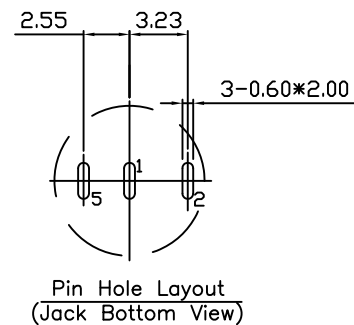
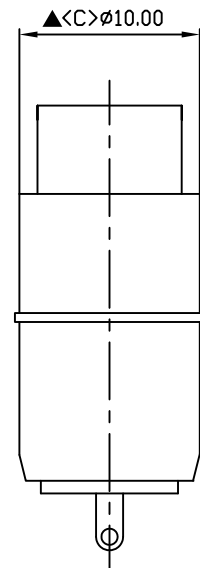
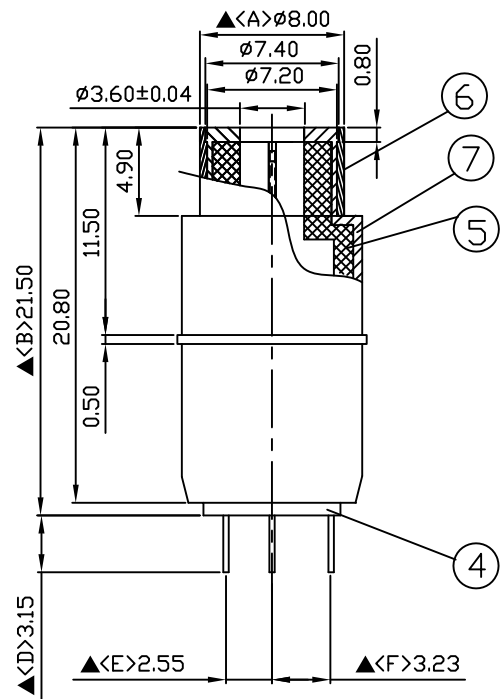




7	Metal Shell	Low Lead Brass Rod	1	Nickel Plated
6	Bushing	PA66	1	Black Color
5	Housing	PBT+30%	1	Black Color
4	Cover	PBT+30%	1	Black Color
3	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
2	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1	Earch Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	QTY	Finish

SC S.C. PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
旭全		09.03.2021	王平華			

PART NAME : 3.5ø PHONE JACK		PART NUMBER: SCJ391M7NXSOBB0L			VERSION: 2.0	
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT: mm		SCALE: 1/1	

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant