
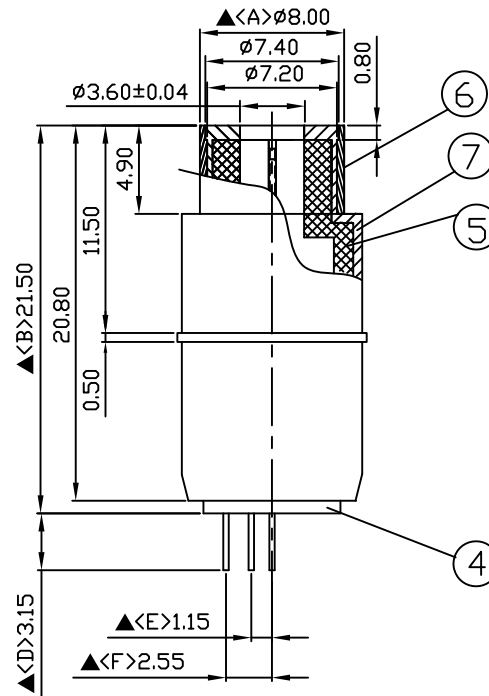


7	Metal Shell	Low Lead Brass Rod	1	Nickel Plated
6	Bushing	PA66	1	Black Color
5	Housing	PBT+30%	1	Black Color
4	Cover	PBT+30%	1	Black Color
3	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
2	Break Terminal	0.3T Brass	1	Silver Plated
1	Earch Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	QTY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
12.30.2021	王平華			


PART NAME : 3.5ø PHONE JACK

PART NUMBER: SCJ391M7NYSOBB0L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant