
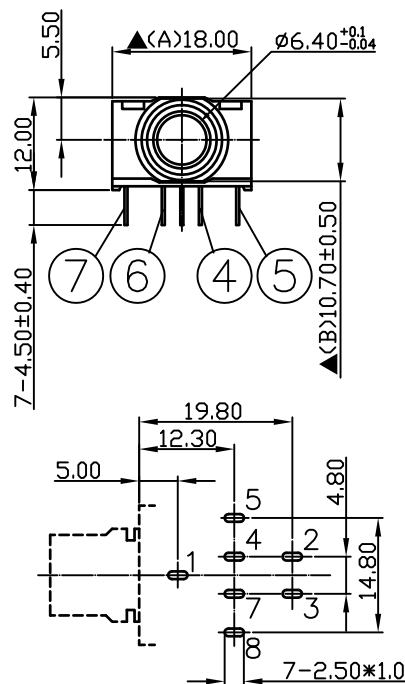
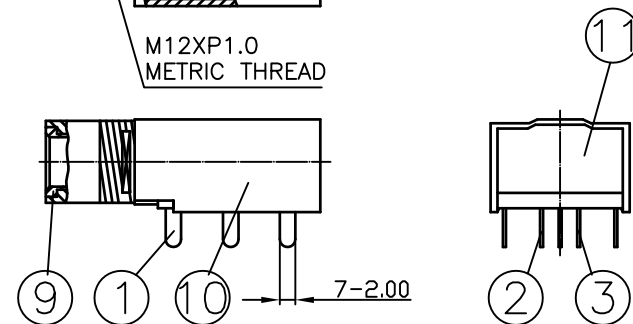
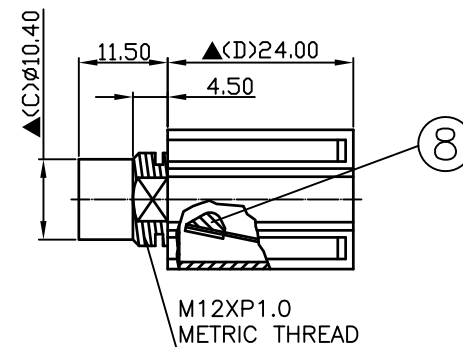
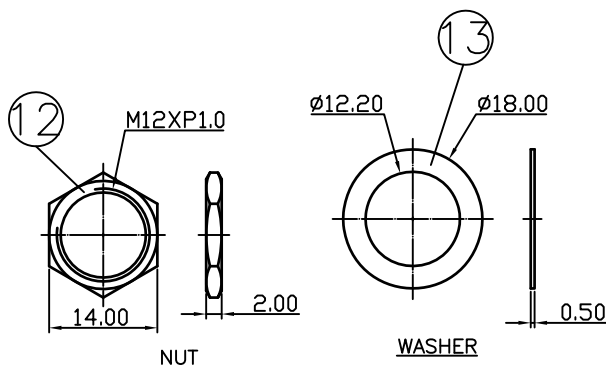


Pin Hole Layout
(Jack Bottom View)

13.	Washer	0.5T Steel	1	Nickel Plated
12.	Nut	2.0T Steel	1	Nickel Plated
11.	Cover	PC	1	Transparent
10.	Housing	PBT+15%	1	Black Color
9.	Metal Ring	Low Lead Brass Rod	1	Nickel Plated
8.	Insulator	POM	2	Black Color
7.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
6.	Transfer Terminal	0.4T Brass	1	Silver Plated
5.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

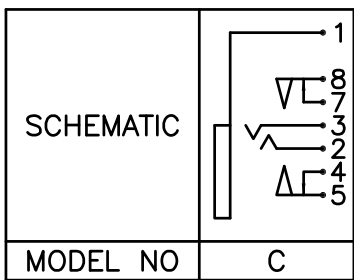

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
11.09.2021	王平華			

PART NAME :6.3Ø PHONE JACK

PART NUMBER: SCJ620R0NCS1B00L

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant