
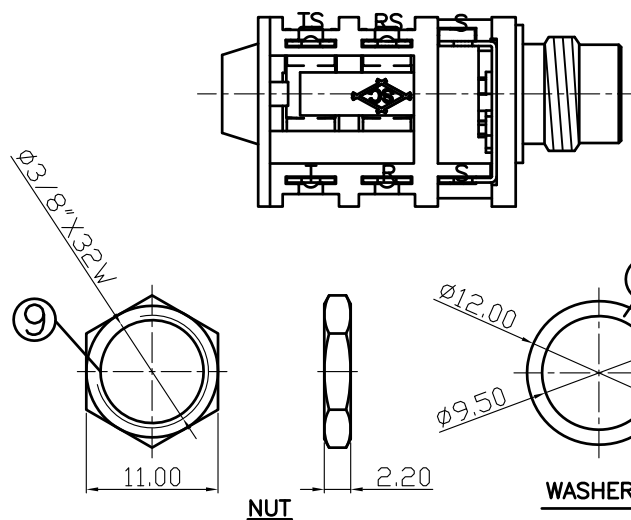
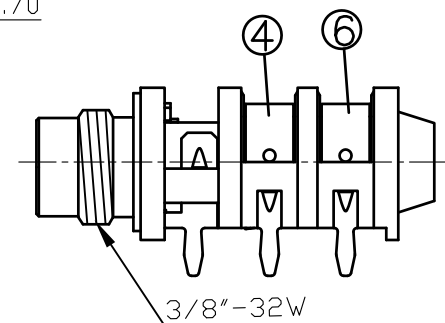
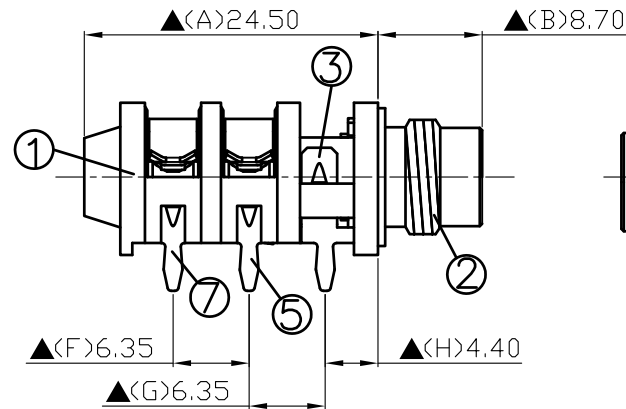
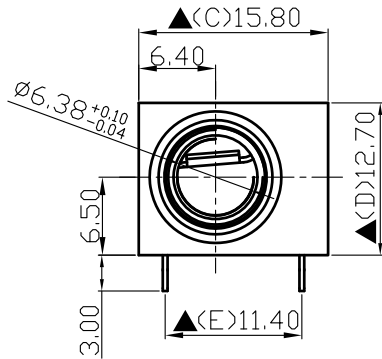



Pin Hole Layout
(Jack Bottom View)

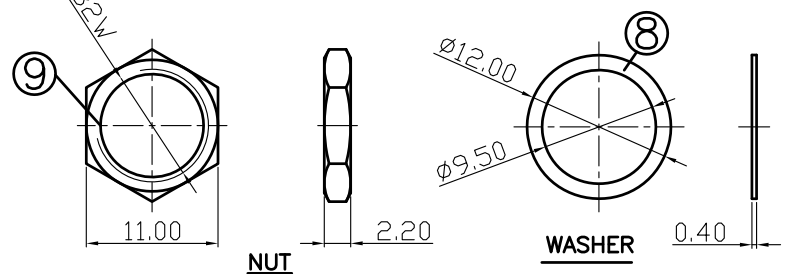

9.	Nut	Low Lead Brass Rod	1	Nickel Plated
8.	Washer	0.4T Brass	1	Nickel Plated
7.	Tip Shunt	0.4T Brass	1	Silver Plated
6.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
5.	Ring Shunt	0.4T Brass	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Brass	1	Silver Plated
2.	Barrel	Low Lead Brass Rod	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	03.30.2022	王平華			

For Redference
僅供參考

RoHS&SVHC
Pb Free Process

PART NAME : 6.3ø PHONE JACK	PART NUMBER: SCJ636M6NFS4BP0L	VERSION: 1.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max

Insulation Resistance : 100MΩ min. at DC 500V

Dielectric Withstand Voltage : AC 500V for one minute

Remark: ▲ : The Most Important Dimension