

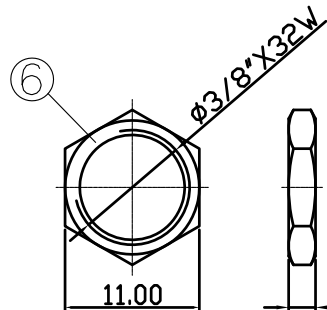
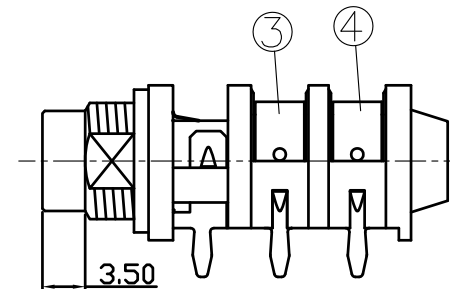
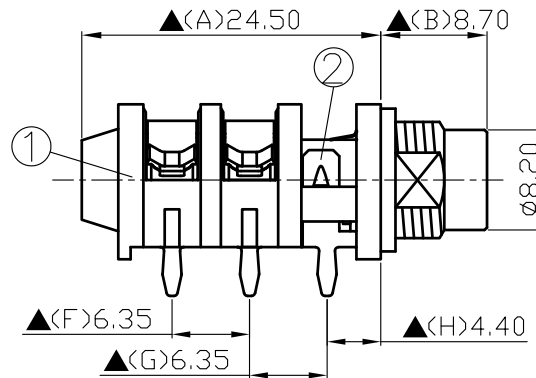




SCHEMATIC	
MODEL NO	C

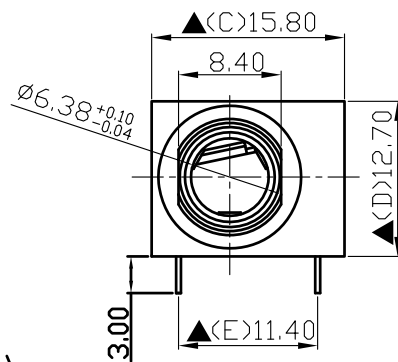

NUT

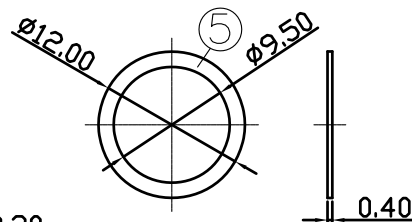

WASHER

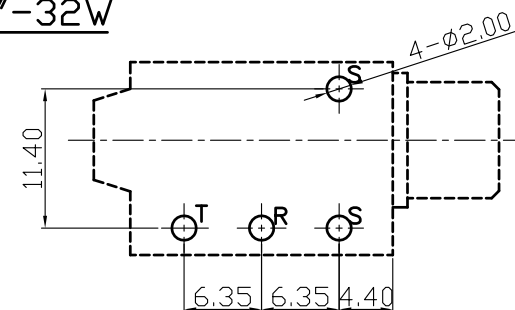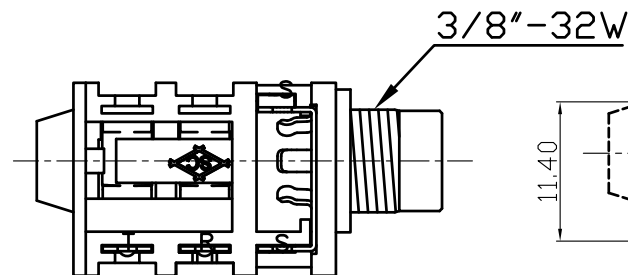

Pin Hole Layout
(Jack Bottom View)

6.	Nut	Low Lead Brass Rod	1	Nickel Plated
5.	Washer	0.4T Brass	1	Nickel Plated
4.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Sleeve Shunt	0.4T Brass	1	Silver Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.30.2022	王平華			

PART NAME : 6.3 ϕ PHONE JACK

PART NUMBER: SCJ636P50CS4BP0L

VERSION:1.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: /

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process