








SCHEMATIC	
MODEL NO	F

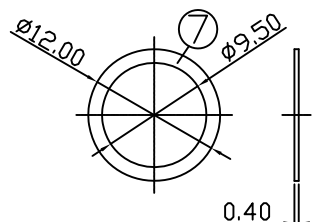

WASHER

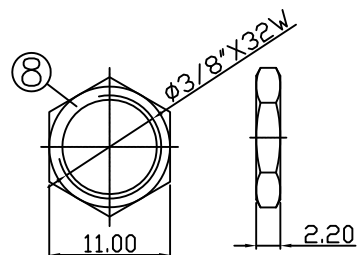

NUT

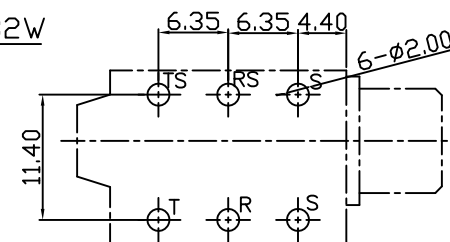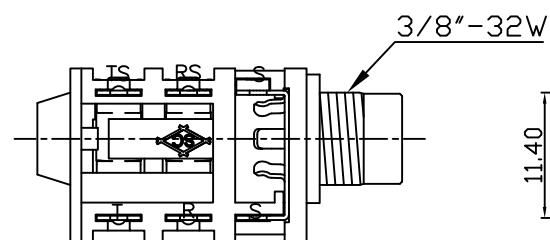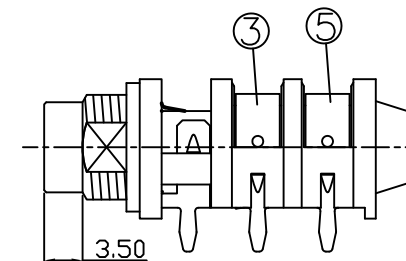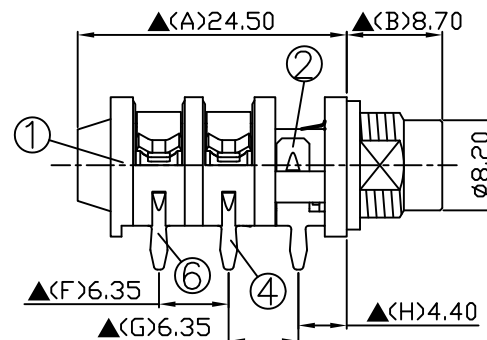

Pin Hole Layout
(Jack Bottom View)

8.	Nut	Low Lead Brass Rod	1	Nickel Plated
7.	Washer	0.4T Brass	1	Nickel Plated
6.	Tip Shunt	0.4T Brass	1	Silver Plated
5.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
4.	Ring Shunt	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Sleeve Shunt	0.4T Brass	1	Silver Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.30.2022	王平華			


PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ636P50FS4BP0L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: /

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process