

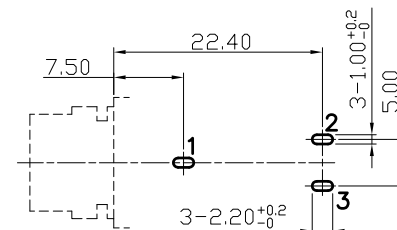
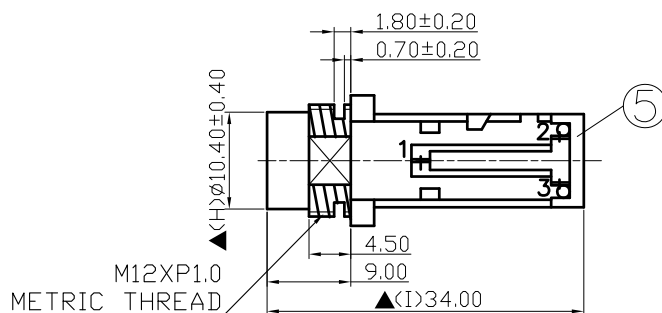
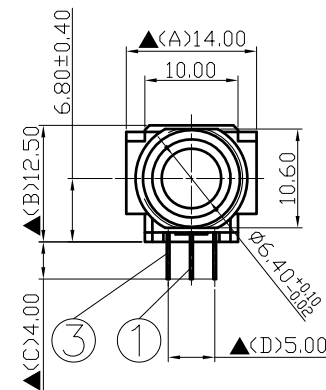
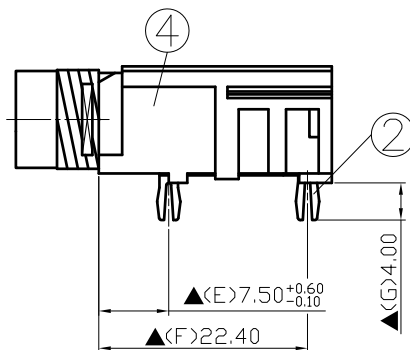


DETAIL "A"(2:1)

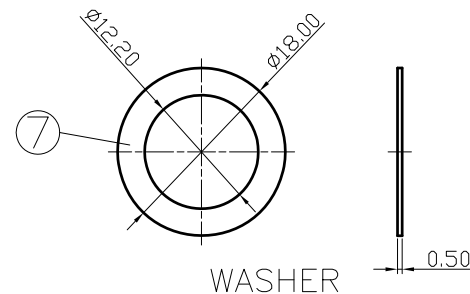

Pin Hole Layout
(Jack Bottom View)

7.	Washer	0.5T Steel	1	Nickel Plated
6.	Nut	2.0T Steel	1	Nickel Plated
5.	Cover	PBT+15%	1	Black Color
4.	Housing	PBT+15%	1	Black Color
3.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO	Descripcion	Material	Q'TY	Finish

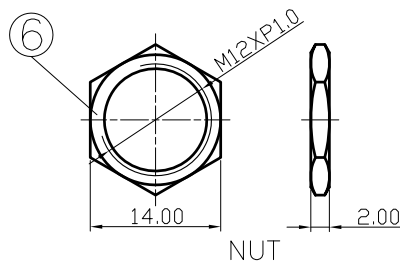

SC S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.05.2021	王平華			

PART NAME : 6.3ø PHONE JACK PART NUMBER: SCJ630P50BS1BH0G VERSION: 10.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED UNIT: mm SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant