

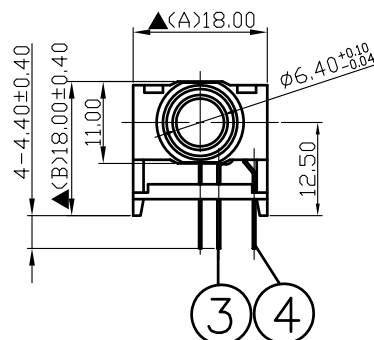
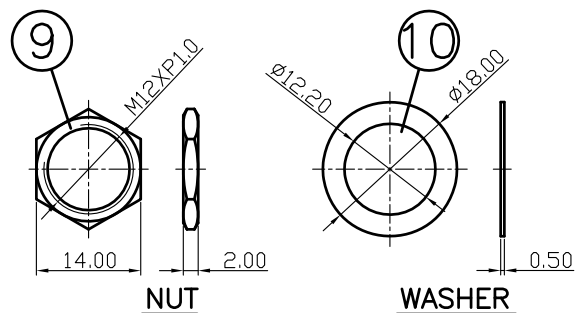
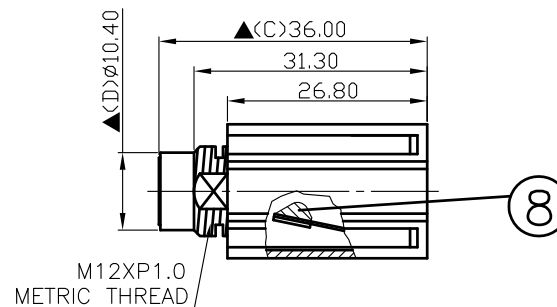



10	Washer	0.5T Steel	1	Nickel Plated
9	Nut	2.0T Steel	1	Nickel Plated
8	Insulator	POM	1	Black Color
7	Bushing	Low Lead Brass Rod	1	Nickel Plated
6	Cover	POM	1	Black Color
5	Housing	PBT	1	Black Color
4	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
3	Transfer Terminal	0.4T Brass	1	Silver Plated
2	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



Pin Hole Layout
(Jack Bottom View)

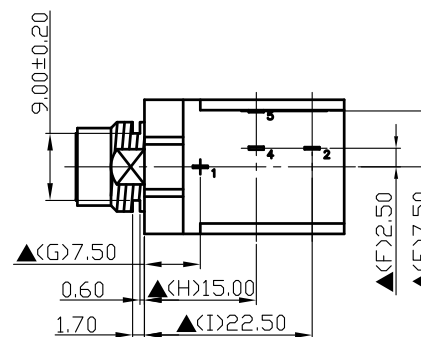

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.26.2022	王平華			

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ634RONGS1B00L

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant