
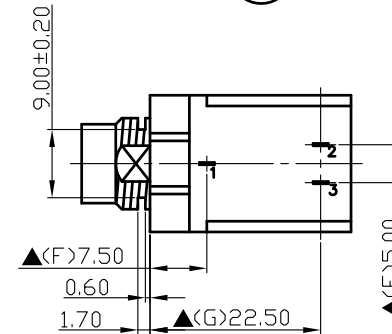


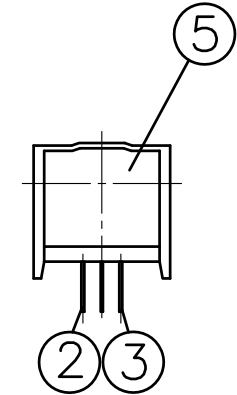
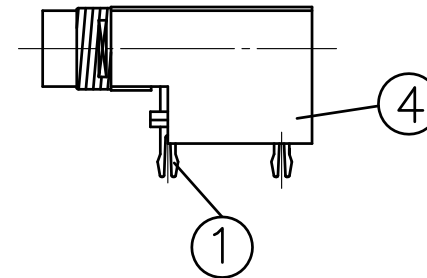
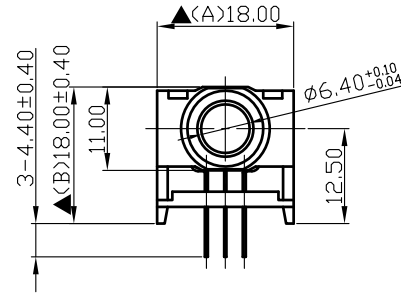
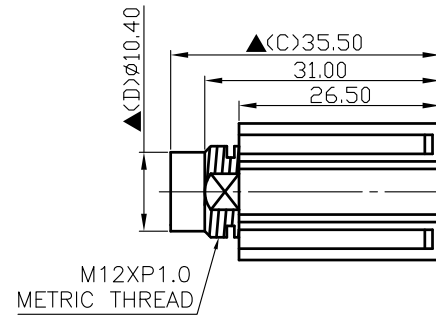


Pin Hole Layout
(Jack Bottom View)

7.	Washer	0.5T Steel	1	Nickel Plated
6.	Nut	2.0T Steel	1	Nickel Plated
5.	Cover	POM	1	Black Color
4.	Housing	PBT	1	Black Color
3.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

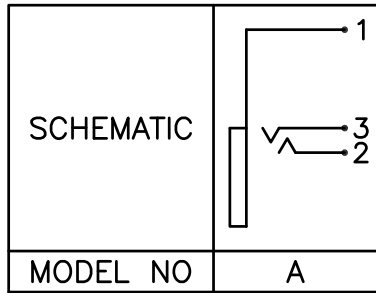

S.C. PRECISION INDUSTRIAL CO., LTD

DATE	DWN	CHKD	APVD	MANAGER
03.25.2022	王平華			

PART NAME : 6.3 ϕ PHONE JACK

PART NUMBER: SCJ634P50AS1B00G

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant