
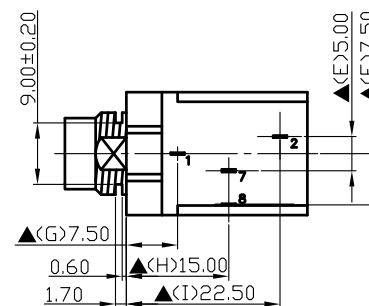

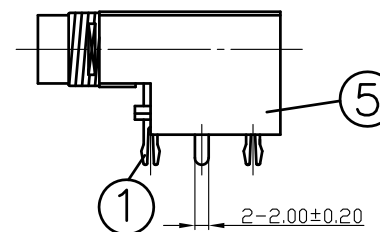

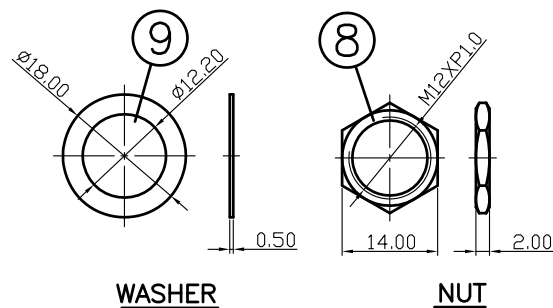
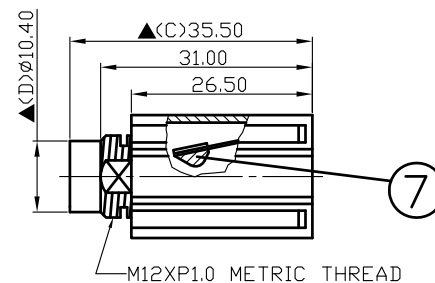


Pin Hole Layout
(Jack Bottom View)

9	Washer	0.5T Steel	1	Nickel Plated
8	Nut	2.0T Steel	1	Nickel Plated
7.	Insulator	POM	1	Black Color
6.	Cover	POM	1	Black Color
5.	Housing	PBT	1	Black Color
4.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
3.	Transfer Terminal	0.4T Brass	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

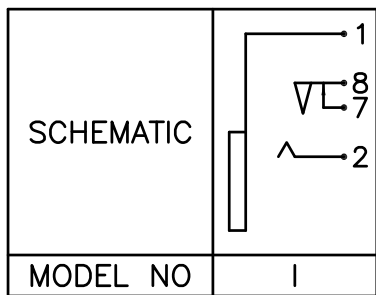

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.25.2022	王平華			

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ634P50IS1B00G

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant