

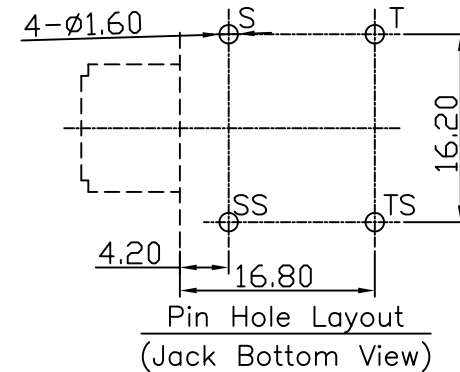
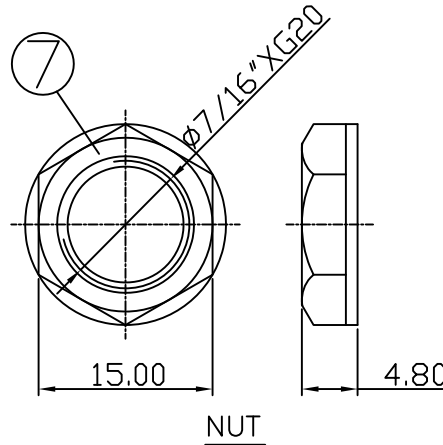
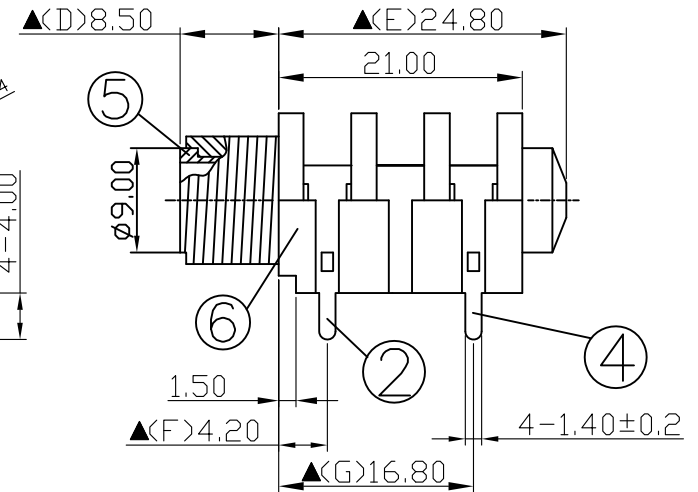
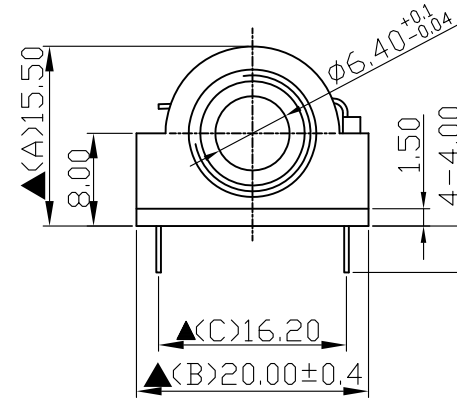


|           |   |
|-----------|---|
| SCHEMATIC |   |
| MODEL NO  | D |

ø7/16"XG20  
METRIC THREAD

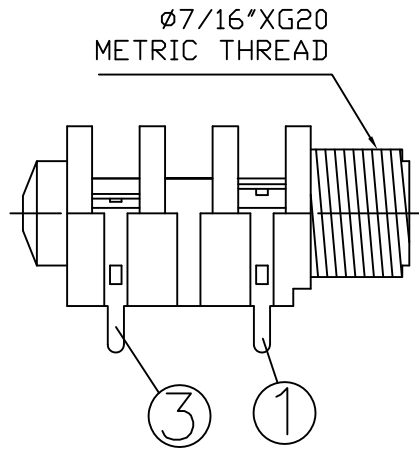

|     |               |                      |      |               |
|-----|---------------|----------------------|------|---------------|
| 8.  | Washer        | Red Vulcanited Fibre | 1    | Red Color     |
| 7.  | Nut-Hexagon   | PA66                 | 1    | Black Color   |
| 6.  | Housing       | PA66                 | 1    | Black Color   |
| 5.  | Metal         | Low Lead Brass Rod   | 1    | Nickel Plated |
| 4.  | Tip Spring    | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 3.  | Tip Shunt     | 0.4T Brass           | 1    | Silver Plated |
| 2.  | Sleeve Spring | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Sleeve Shunt  | 0.4T Brass           | 1    | Silver Plated |
| NO. | Description   | Material             | Q'TY | Finish        |

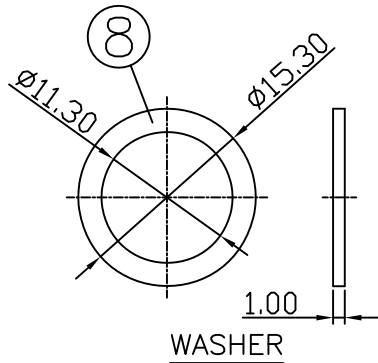

**S.C.PRECISION INDUSTRIAL CO., LTD.**

|            |     |      |      |         |
|------------|-----|------|------|---------|
| DATE       | DWN | CHKD | APVD | MANAGER |
| 04.01.2022 | 王平華 |      |      |         |

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ638R4NDS5BP0L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

**SPECIFICATIONS:**

Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension

For Redference  
僅供參考

RoHS&SVHC  
Pb Free Process