

A

B

C

D

E


A




B

C


D

E


SCHEMATIC	
MODEL NO	G

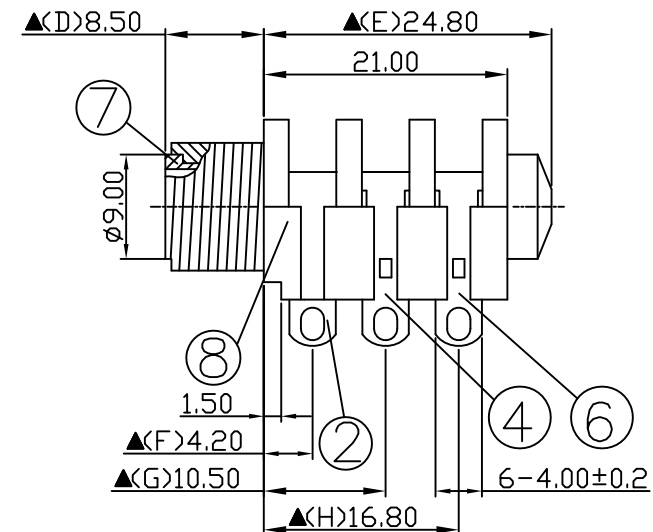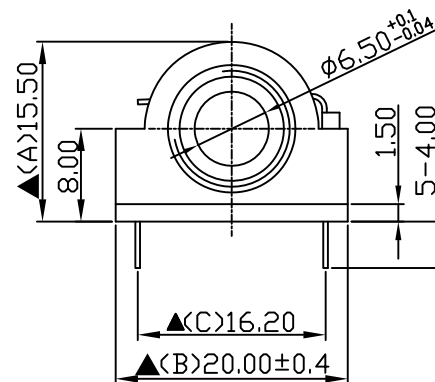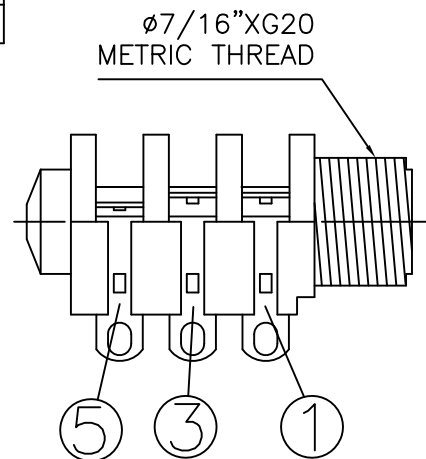

10.	Washer	Red Vulcanited Fibre	1	Red Color
9.	Nut-Hexagon	PA66	1	Black Color
8.	Housing	PA66	1	Black Color
7.	Metal	Low Lead Brass Rod	1	Nickel Plated
6.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
5.	Tip Shunt	0.4T Brass	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Ring Shunt	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Sleeve Shunt	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

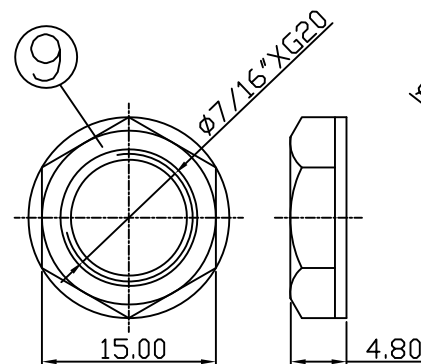

NUT

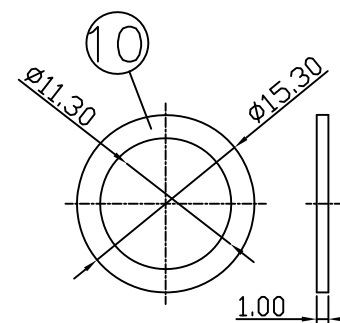

WASHER



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
04.02.2022	王平華			


PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ638R4NGS5BW0L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Pb Free Process