

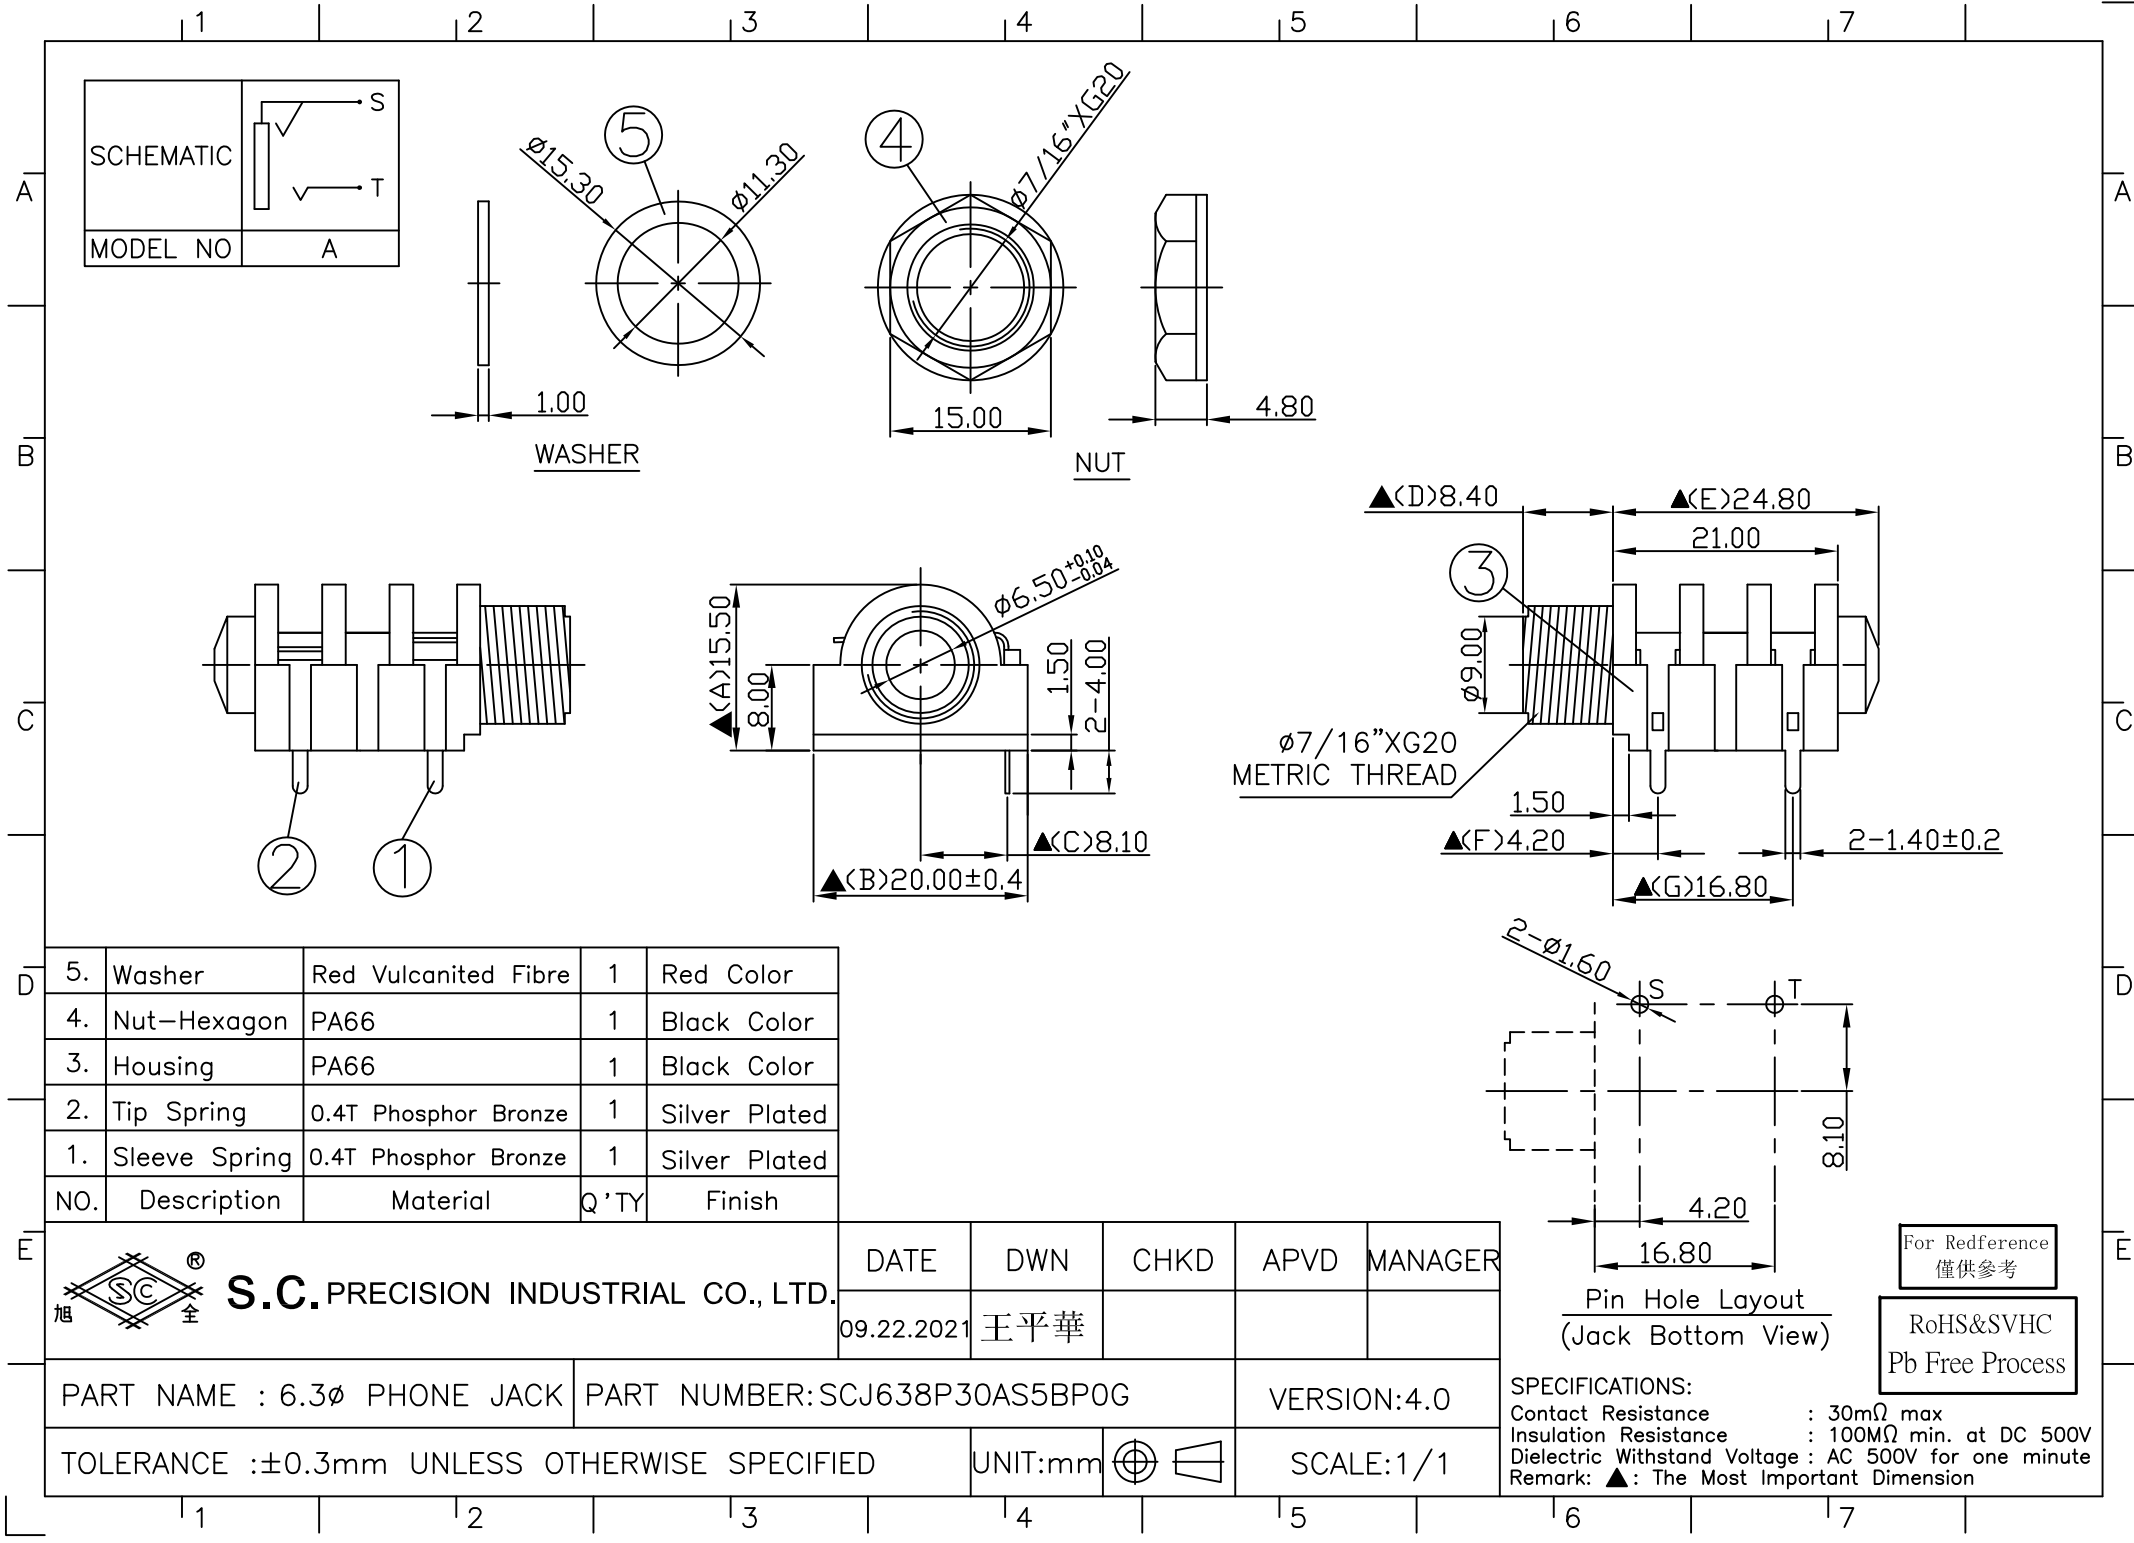
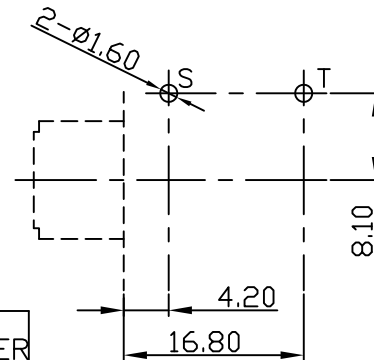
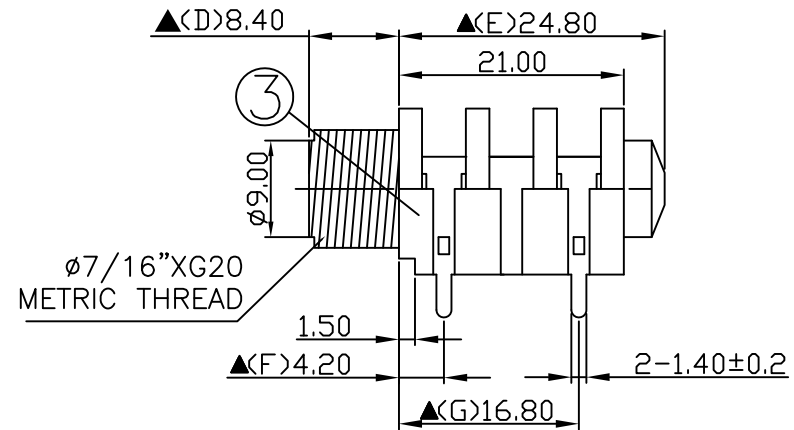


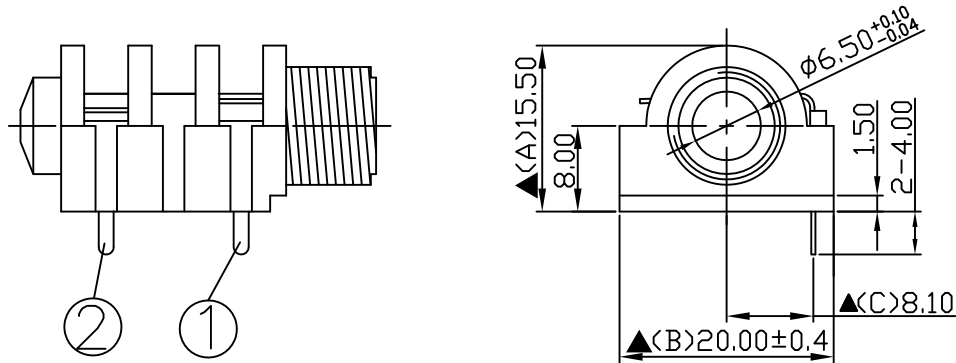

SCHEMATIC	
MODEL NO	A

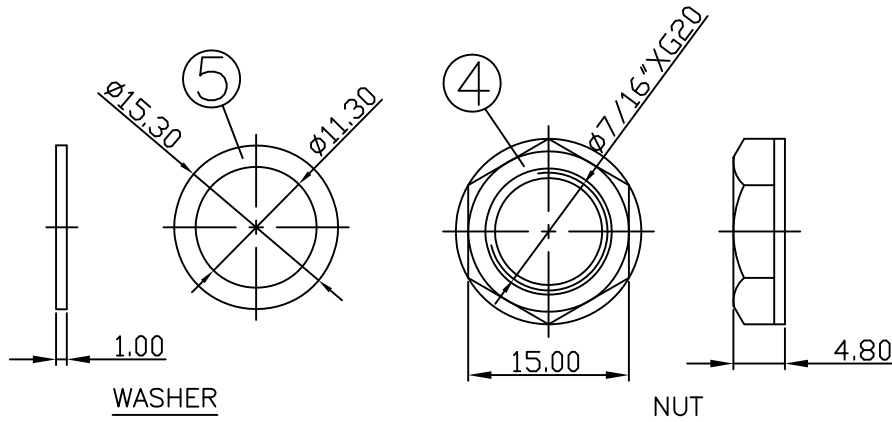

5.	Washer	Red Vulcanited Fibre	1	Red Color
4.	Nut-Hexagon	PA66	1	Black Color
3.	Housing	PA66	1	Black Color
2.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

	S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
		09.22.2021	王平華			

PART NAME : 6.3 ϕ PHONE JACK	PART NUMBER: SCJ638P30AS5BP0G	VERSION: 4.0
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max

Insulation Resistance : 100M Ω min. at DC 500V

Dielectric Withstand Voltage : AC 500V for one minute

Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process