


A

B



C

D




E




Ø7/16"XG20  
METRIC THREAD

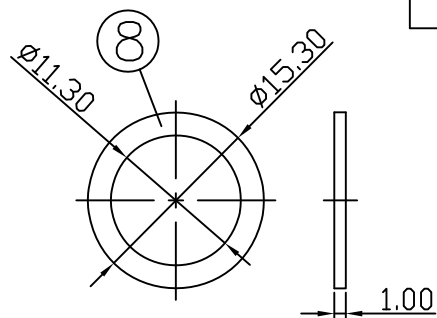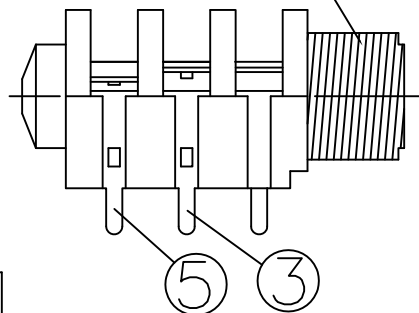

WASHER

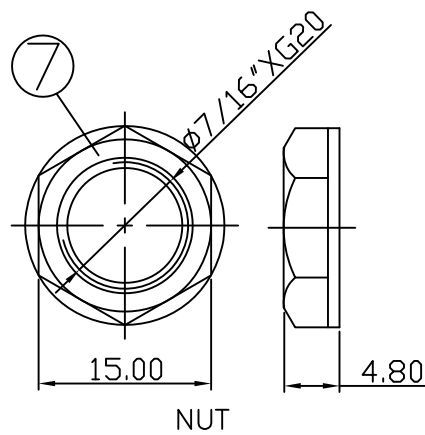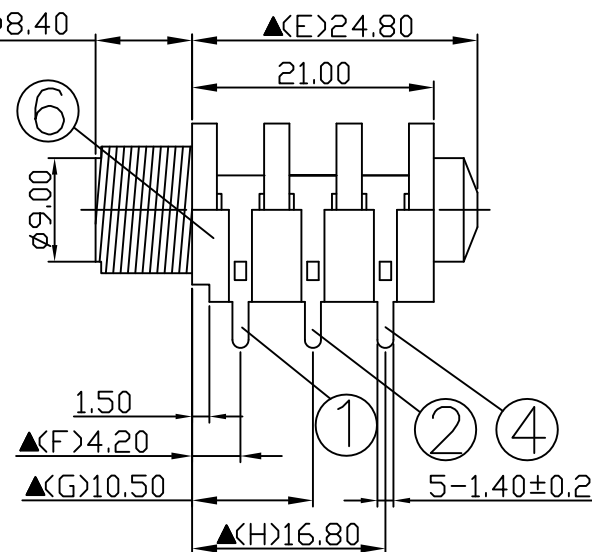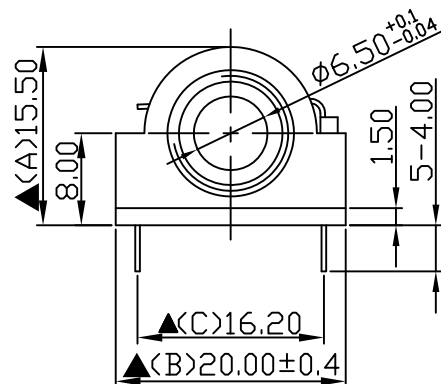

NUT

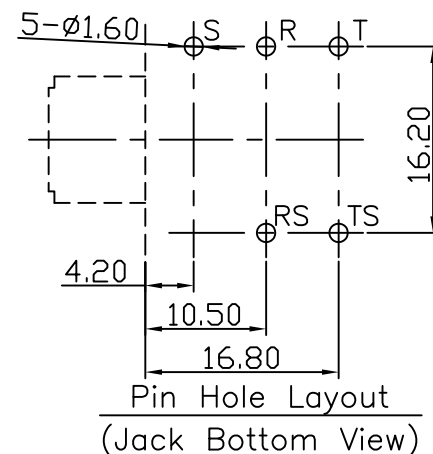

|     |               |                      |      |               |
|-----|---------------|----------------------|------|---------------|
| 8.  | Washer        | Red Vulcanited Fibre | 1    | Red Color     |
| 7.  | Nut-Hexagon   | PA66                 | 1    | Black Color   |
| 6.  | Housing       | PA66                 | 1    | Black Color   |
| 5.  | Tip Shunt     | 0.4T Brass           | 1    | Silver Plated |
| 4.  | Tip Spring    | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 3.  | Ring Shunt    | 0.4T Brass           | 1    | Silver Plated |
| 2.  | Ring Spring   | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Sleeve Spring | 0.4T Phosphor Bronze | 1    | Silver Plated |
| NO. | Description   | Material             | Q'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 04.01.2022 | 王平華 |      |      |         |


PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ638P30FS5BP0G

VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension

For Redference  
僅供參考

RoHS&SVHC  
Pb Free Process