
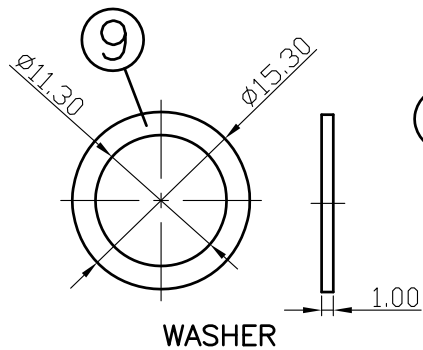



SCHEMATIC	
MODEL NO	G

ø7/16"XG20
METRIC THREAD


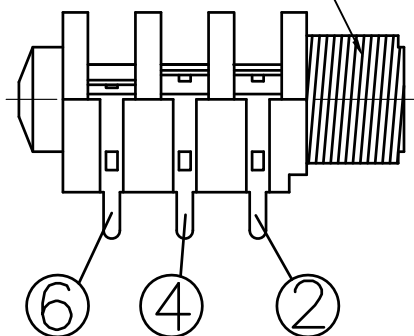


WASHER

9.	Washer	Red Vulcanited Fibre	1	Red Color
8.	Nut-Hexagon	PA66	1	Black Color
7.	Housing	PA66	1	Black Color
6.	Tip Shunt	0.4T Brass	1	Silver Plated
5.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
4.	Ring Shunt	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Sleeve Shunt	0.4T Brass	1	Silver Plated
1.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

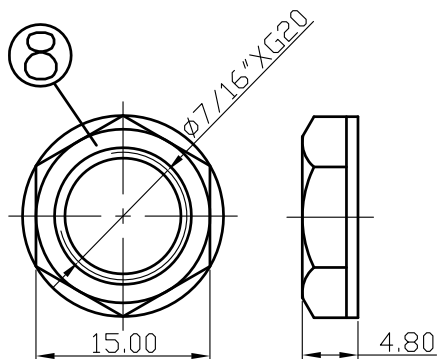

NUT

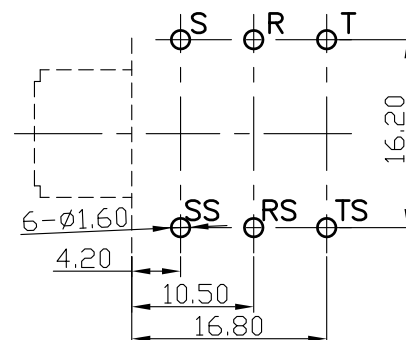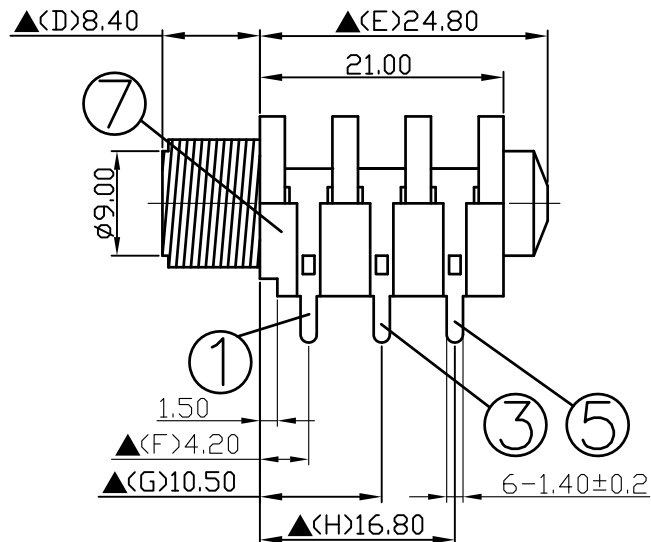

Pin Hole Layout
(Jack Bottom View)



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
04.01.2022	王平華			

For Redference
僅供參考

RoHS&SVHC
Pb Free Process

PART NAME : 6.3ø PHONE JACK

PART NUMBER:SCJ638P30GS5BP0G

VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension