

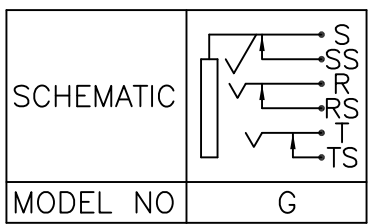
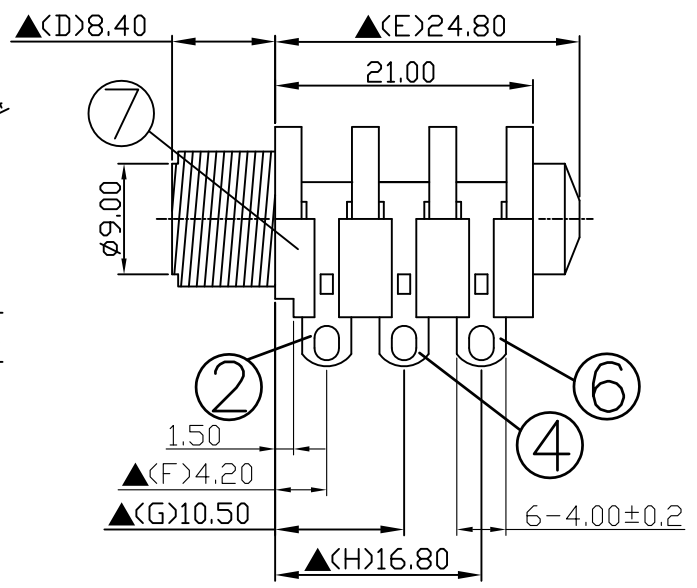



A
B
C
D
E

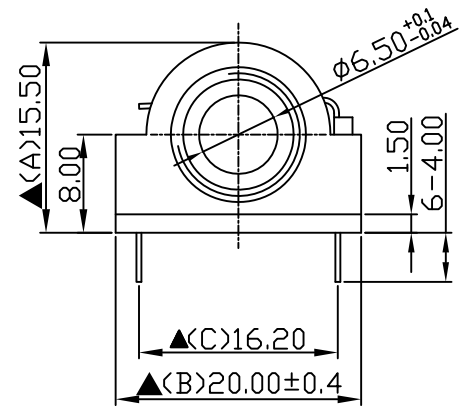


Ø7/16"XG20
METRIC THREAD

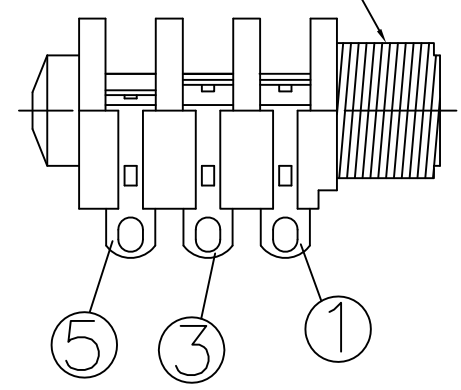

9.	Washer	Red Vulcanited Fibre	1	Red Color
8.	Nut-Hexagon	PA66	1	Black Color
7.	Housing	PA66	1	Black Color
6.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
5.	Tip Shunt	0.4T Brass	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Ring Shunt	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Sleeve Shunt	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

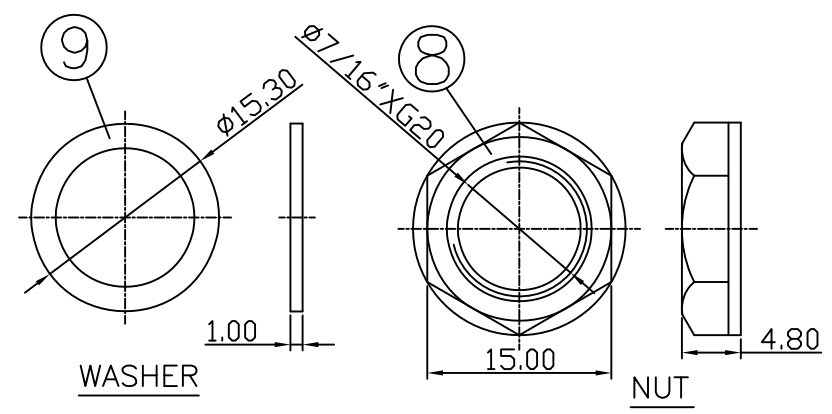

 **S.C. PRECISION INDUSTRIAL CO., LTD.**

DATE	DWN	CHKD	APVD	MANAGER
04.01.2022	王平華			

For Redference
僅供參考

RoHS&SVHC
Pb Free Process

PART NAME : 6.3Ø PHONE JACK	PART NUMBER: SCJ638P30GS5BW0G	VERSION:4.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

A
B
C
D
E