


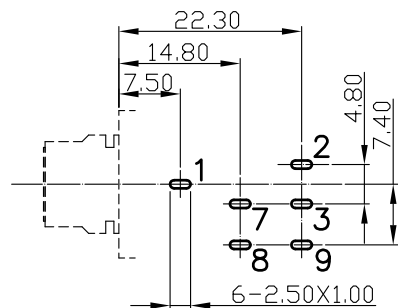
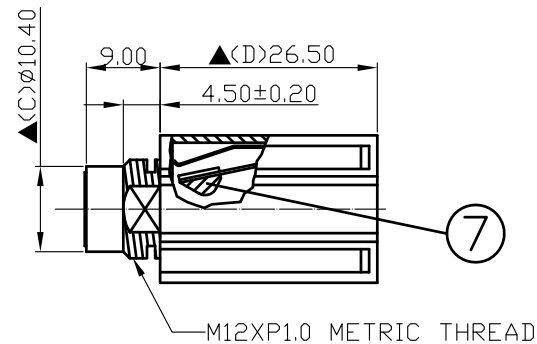
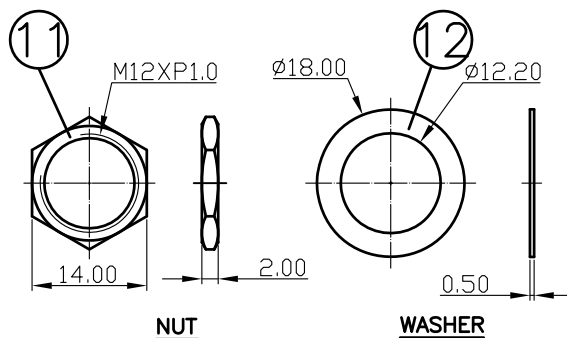
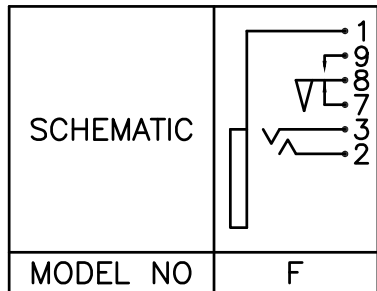



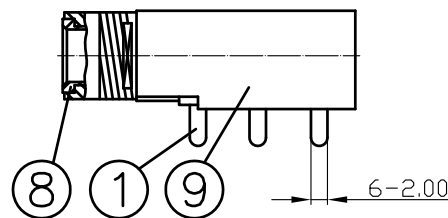

Pin Hole Layout
(Jack Bottom View)

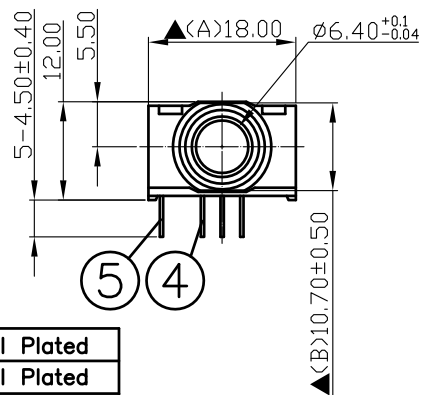

12.	Washer	0.5T Steel	1	Nickel Plated
11.	Nut	2.0T Steel	1	Nickel Plated
10.	Cover	PC	1	Transporent
9.	Housing	PBT+15%	1	Black Color
8.	Metal Ring	Low Lead Brass Rod	1	Nickel Plated
7.	Insulator	POM	1	Black Color
6.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
5.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

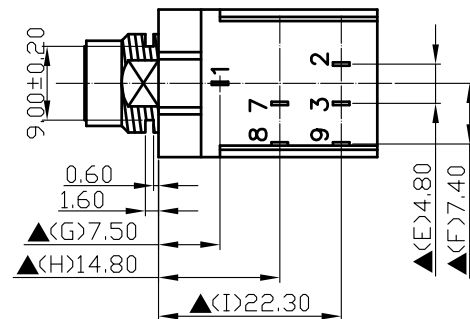

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
11.09.2021	王平華			


PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ624R0NFS1B00L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant