
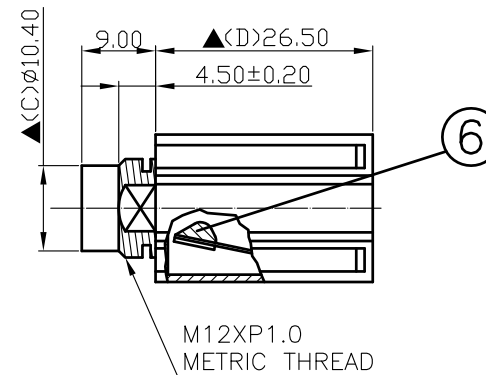
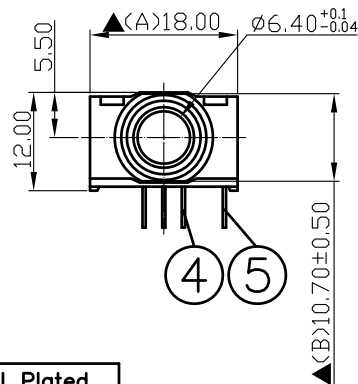
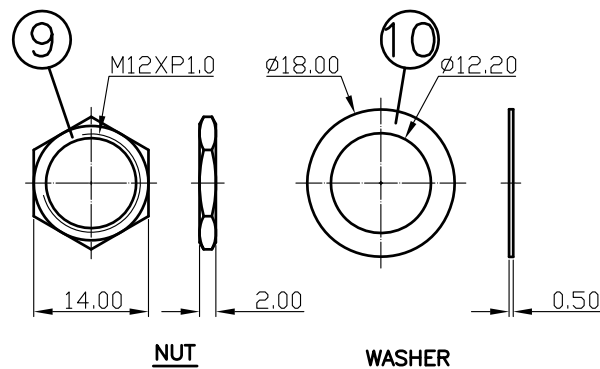
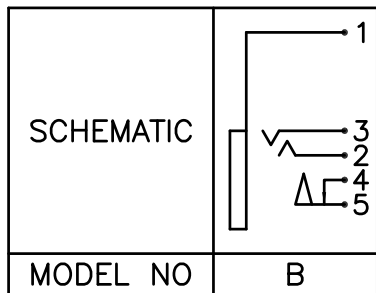
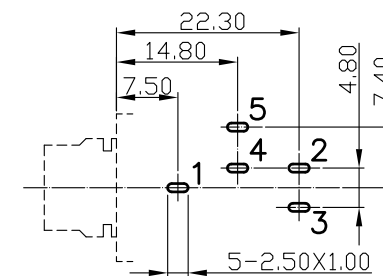


10.	Washer	0.5T Steel	1	Nickel Plated
9.	Nut	2.0T Steel	1	Nickel Plated
8.	Cover	PC	1	Transparent
7.	Housing	PBT+15%	1	Black Color
6.	Insulator	POM	1	Black Color
5.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

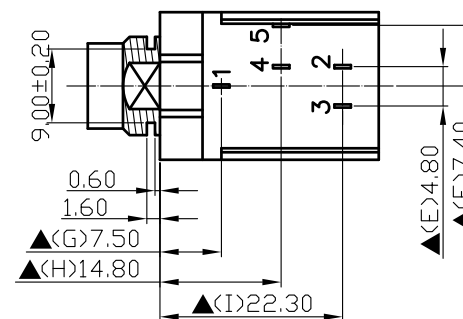

Pin Hole Layout
(Jack Bottom View)

	DATE		DWN	CHKD	APVD	MANAGER
	01.11.2022		王平華			

PART NAME : 6.3ø PHONE JACK	PART NUMBER: SCJ624P50BS1B00G	VERSION: 4.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant