

A

B

C


D

E


SCHEMATIC

MODEL NO

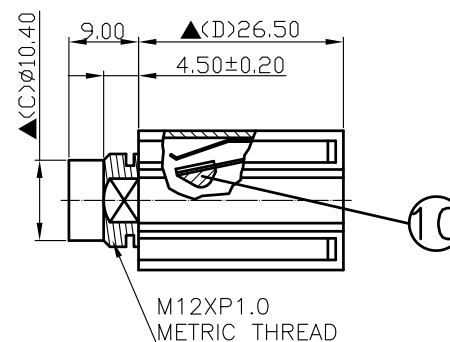
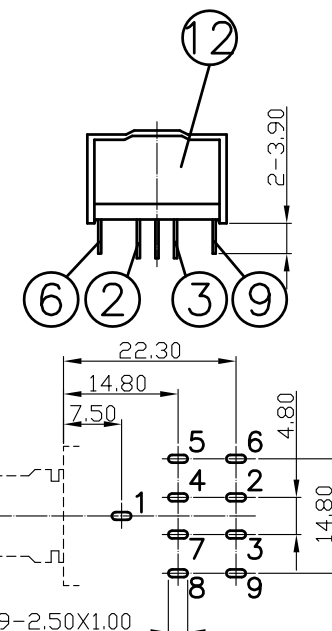
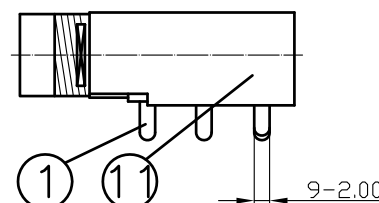
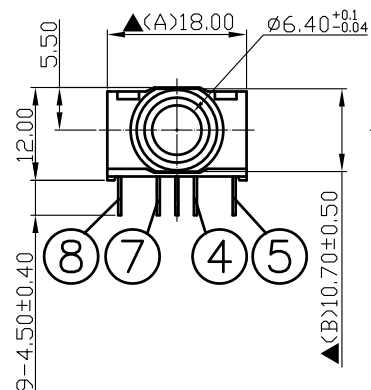
D

1
2
3
4
5
6
7
8
9

WASHER



NUT

M12XP1.0
METRIC THREADPin Hole Layout
(Jack Bottom View)

14.	Washer	0.5T Steel	1	Nickel Plated
13.	Nut	2.0T Steel	1	Nickel Plated
12.	Cover	PC	1	Transparent
11.	Housing	PBT+15%	1	Black Color
10.	Insulator	POM	2	Black Color
9.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
8.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.4T Brass	1	Silver Plated
6.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
5.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

DATE

DWN

CHKD

APVD

MANAGER

01.11.2022

王平華



S.C. PRECISION INDUSTRIAL CO., LTD.

PART NAME :6.3ø PHONE JACK

PART NUMBER: SCJ624P50DS1B00G

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Compliant