
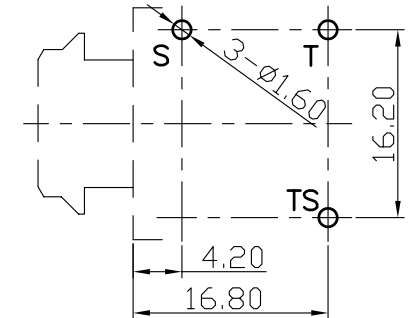
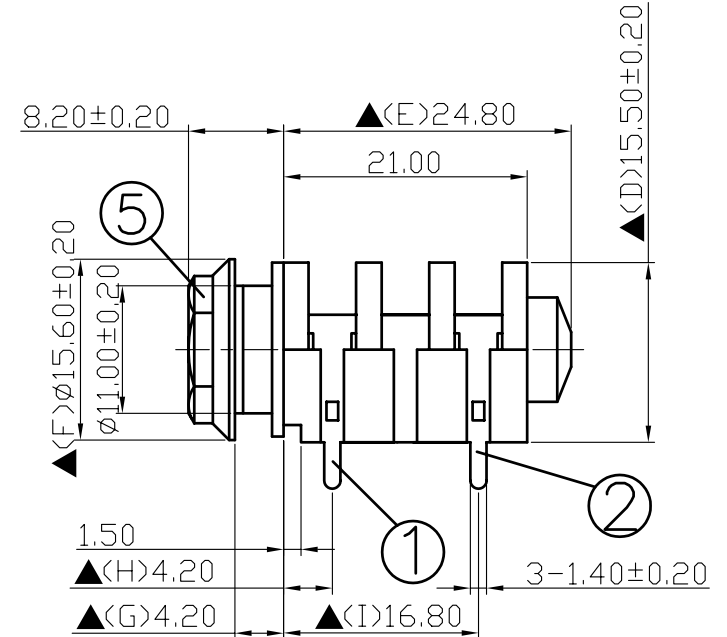
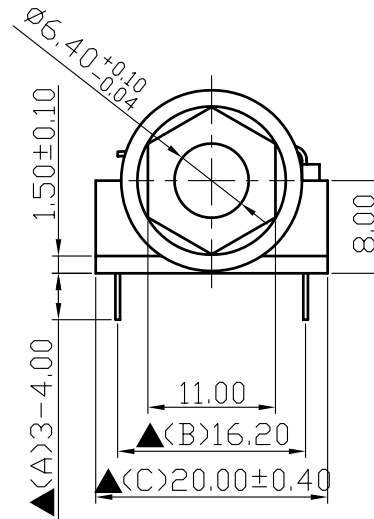
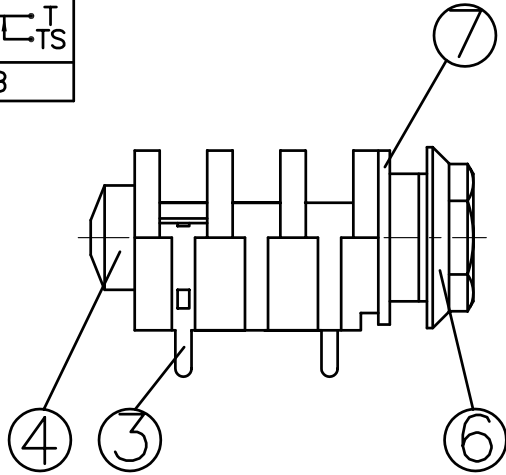




Pin Hole Layout
(Jack Bottom View)

7.	Washer	PAPER SHEET t1.0	1	Red Color
6.	Bushing	PA66	1	Black Color
5.	Nut-Metal	Brass	1	Nickel Plated
4.	Housing	PA66	1	Black Color
3.	Tip Shunt	0.4T Bronze	1	Silver Plated
2.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

	DATE				DWN	CHKD	APVD	MANAGER
	10.12.2011							

PART NAME : 6.3ø PHONE JACK		PART NUMBER: SCJ644R5NBS0BP0G			VERSION: 5.0		
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED				UNIT: mm		SCALE: 1/1	

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Pb Free Process

For Reference
僅供參考