

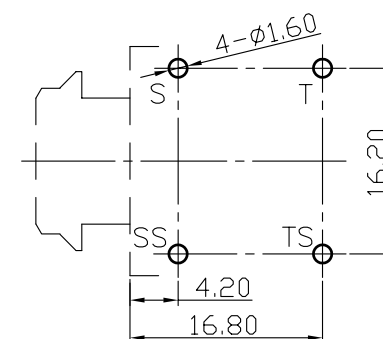
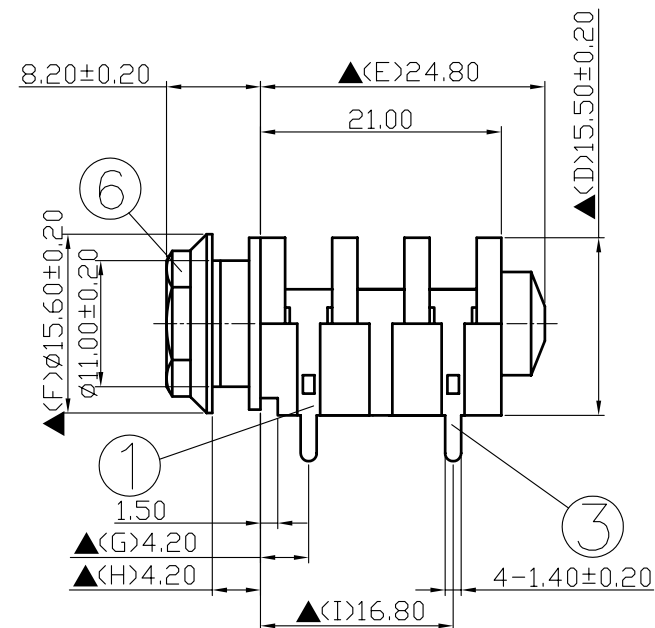
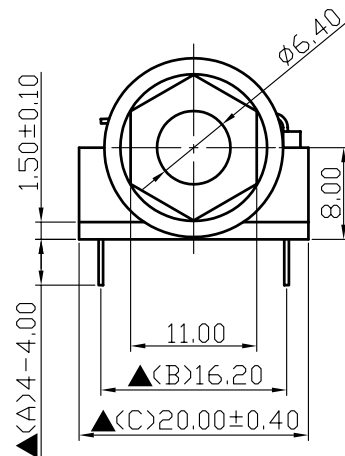


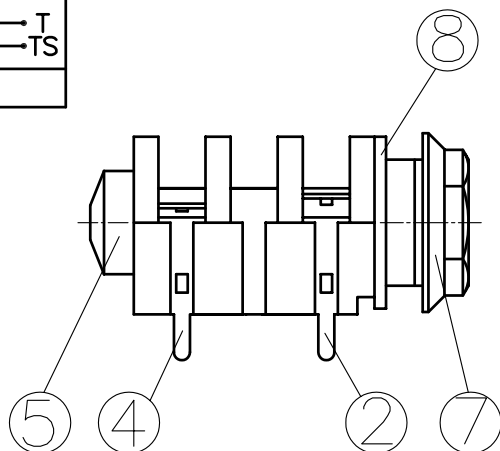

Pin Hloe Layout
(Jack Bottom View)

8.	Washer	PAPER SHEET t1.0	1	Red Color
7.	Bushing	PA66	1	Black Color
6.	Nut-Metal	Brass	1	Nickel Plated
5.	Housing	PA66	1	Black Color
4.	Tip Shunt	0.4T Bronze	1	Silver Plated
3.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Sleeve Shunt	0.4T Bronze	1	Silver Plated
1.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.12.2011				

PART NAME : 6.3 ϕ PHONE JACK

PART NUMBER: SCJ644R5NDS0BP0G

VERSION: 5.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Pb Free Process

For Reference
僅供參考