
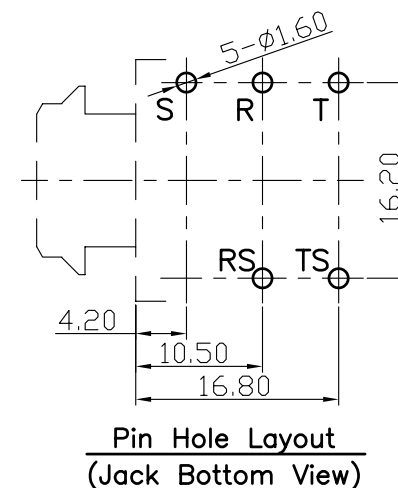
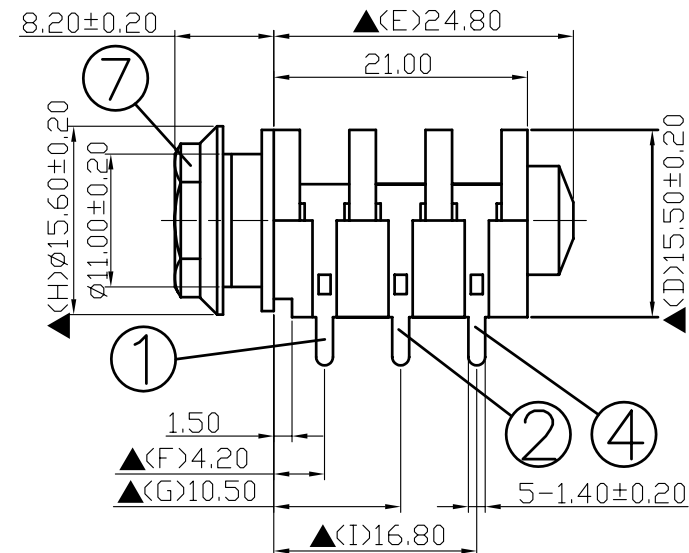
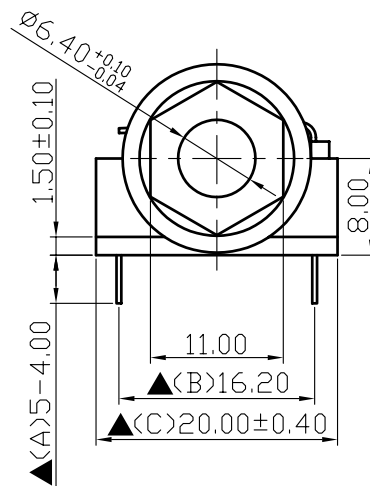


|           |   |
|-----------|---|
| SCHEMATIC |   |
| MODEL NO  | F |

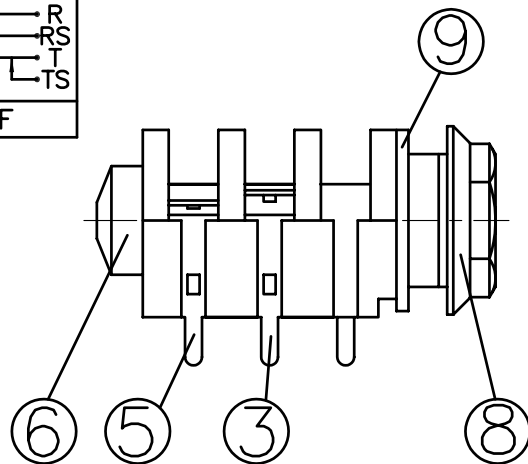

| 9.  | Washer        | PAPER SHEET t1.0     | 1    | Red Color     |
|-----|---------------|----------------------|------|---------------|
| 8.  | Bushing       | PA66                 | 1    | Black Color   |
| 7.  | Nut-Metal     | Brass                | 1    | Nickel Plated |
| 6.  | Housing       | PA66                 | 1    | Black Color   |
| 5.  | Tip Shunt     | 0.4T Bronze          | 1    | Silver Plated |
| 4.  | Tip Spring    | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 3.  | Ring Shunt    | 0.4T Bronze          | 1    | Silver Plated |
| 2.  | Ring Spring   | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Sleeve Spring | 0.4T Phosphor Bronze | 1    | Silver Plated |
| NO. | Description   | Material             | Q'TY | Finish        |

|  |            |  |  |  |     |      |      |         |
|--|------------|--|--|--|-----|------|------|---------|
|  | DATE       |  |  |  | DWN | CHKD | APVD | MANAGER |
|  | 10.12.2011 |  |  |  |     |      |      |         |

|                                               |  |                               |  |          |              |            |  |
|-----------------------------------------------|--|-------------------------------|--|----------|--------------|------------|--|
| PART NAME : 6.3φ PHONE JACK                   |  | PART NUMBER: SCJ644R5NFS0BP0G |  |          | VERSION: 6.0 |            |  |
| TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED |  |                               |  | UNIT: mm |              | SCALE: 1/1 |  |

RoHS  
Pb Free Process  
 For Reference  
僅供參考  
 SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension