

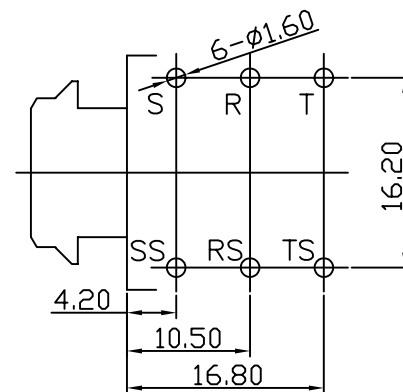
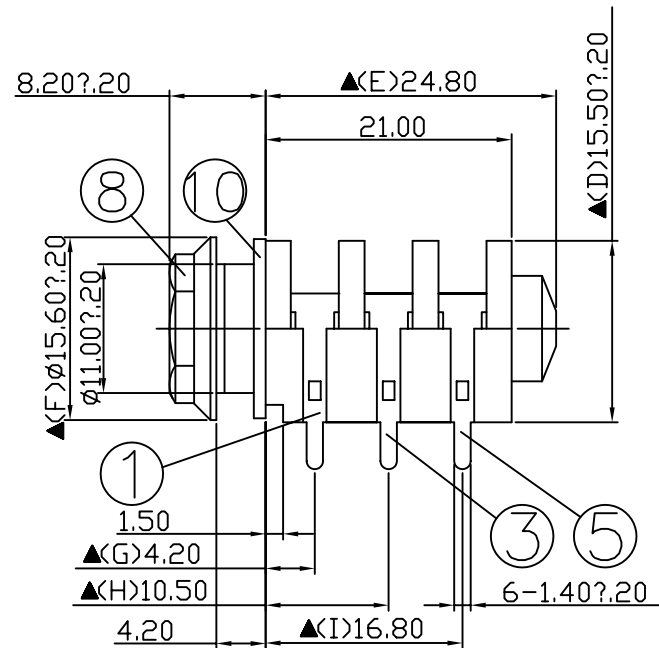


SCHEMATIC	
MODEL NO	G

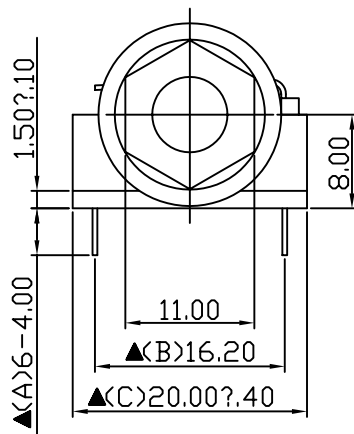

Pin Hole Layout
(Jack Bottom View)

10.	Washer	PAPER SHEET t1.0	1	Red Color
9.	Bushing	PA66	1	Black Color
8.	Nut-Metal	Brass	1	Nickel Plated
7.	Housing	PA66	1	Black Color
6.	Tip Shunt	0.4T Bronze	1	Silver Plated
5.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
4.	Ring Shunt	0.4T Bronze	1	Silver Plated
3.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Sleeve Shunt	0.4T Bronze	1	Silver Plated
1.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

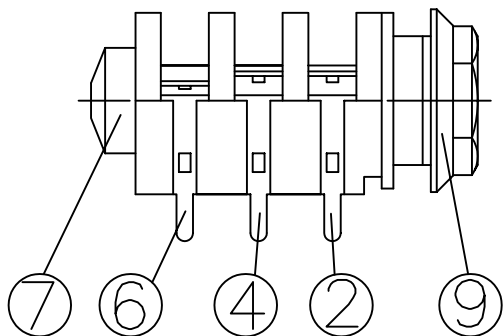

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
11.22.2011				


PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ644R5NGS0BP0G

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Pb Free Process

For Reference
僅供參考