
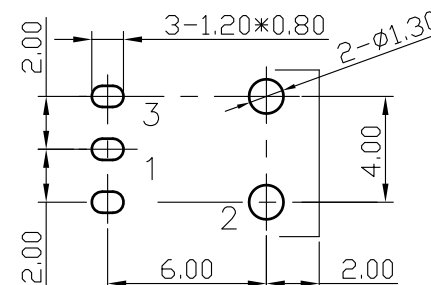

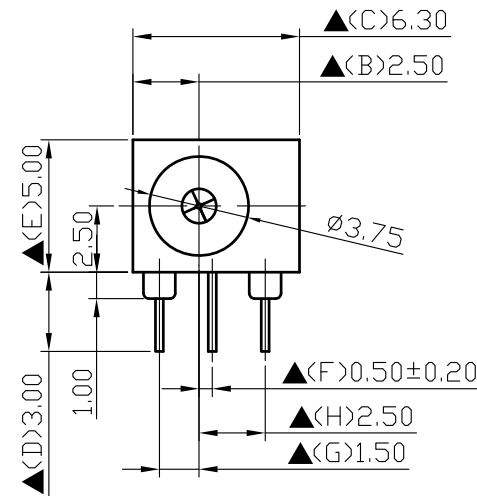
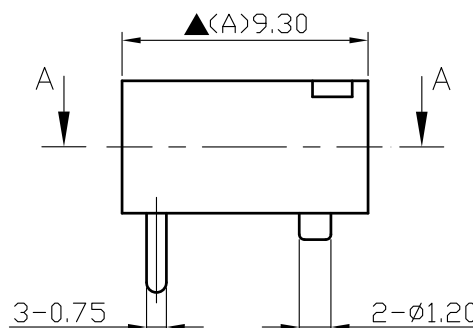

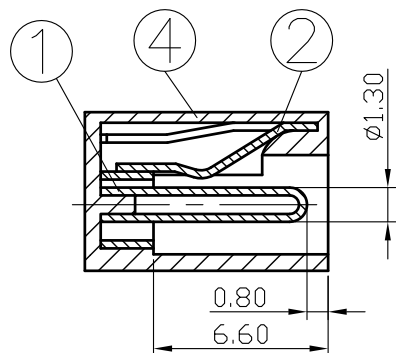


SCHEMATIC		
MODEL NO	C	

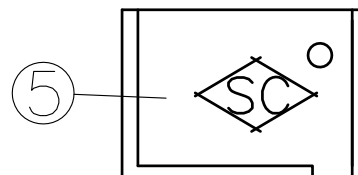

Pin Hole Layout
Jack Bottom View

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:

Contact Resistance	: 30m Ωmax
Current Rating	: Max 5A , 24V DC
Insulation Resistance	: 100MΩ min. at DC 500V
Dielectric Withstanding Voltage	: AC 500V for one minute
Remark: ▲: The Most Important Dimension	

5.	Cover	PBT+30%	1	Black Color
4.	Housing	PBT+30%	1	Black Color
3.	Pin Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.3T Beryllium	1	Silver Plated
1.	Pin(1.3ø)	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD. 旭 全	DATE	DWN	CHKD	APVD	MANAGER
	09.22.2021	王平華			

PART NAME : DC POWER JACK	PART NUMBER: SCD410ACS000B00G	VERSION: 10.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1