


1 2 3 4 5 6 7

A




SCHEMATIC



MODEL NO

L



B

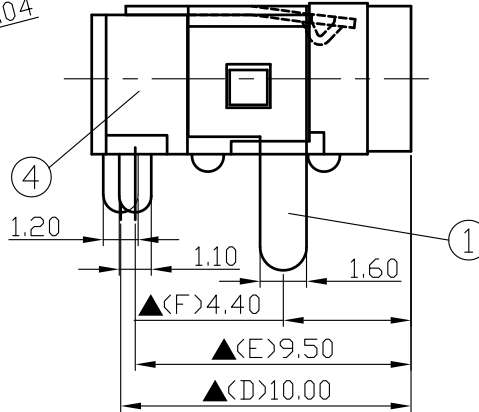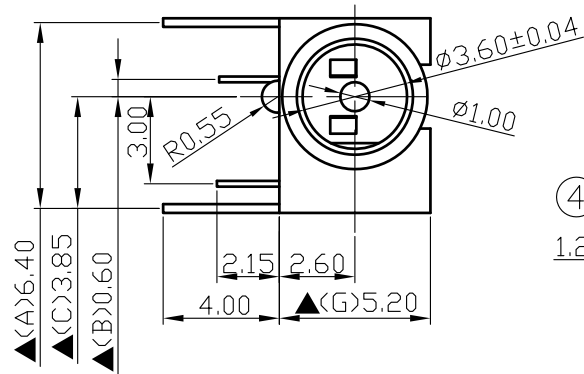

C

D

4.	Housing	PBT+30%	1	Black Color
3.	Pin(Ø1.0)	0.2T Brass	1	Tin Plated
2.	Spring Terminal	0.2T Phosphor Bronze	1	Tin Plated
1.	Earth Terminal(Barrel)	0.3T Phosphor Bronze	1	Tin Plated
NO.	Description	Material	Q'TY	Finish

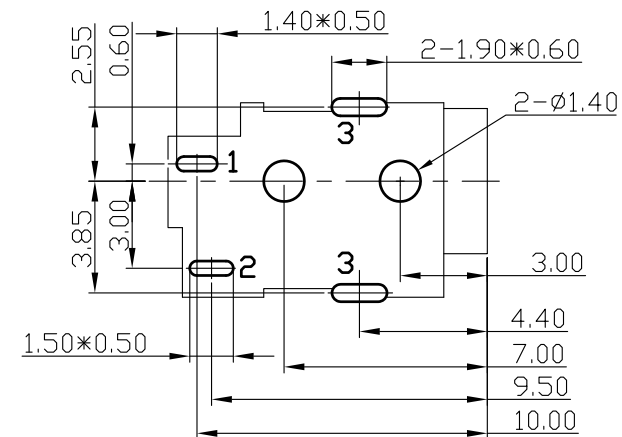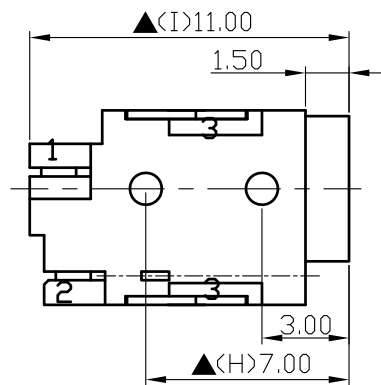

Pin Hole Layout
(Jack Bottom View)

E



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.20.2021	王平華			

PART NAME :DC POWER JACK

PART NUMBER:SCD412ELTR00B00G

VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:/

For Redference
僅供參攷

RoHS&SVHC
Compliant

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5A , 24V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension