


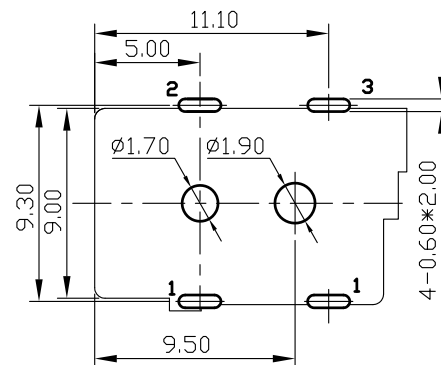
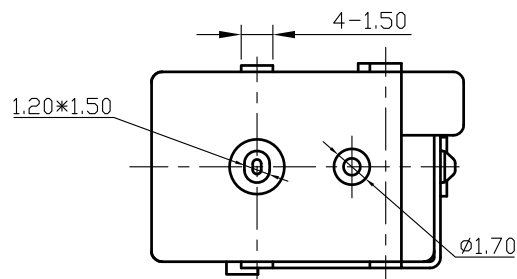
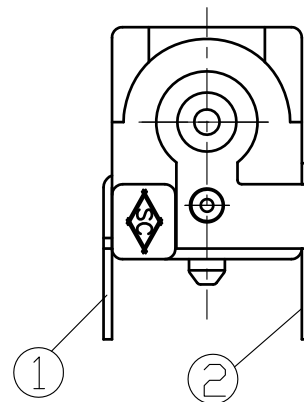


|           |                                                                                   |
|-----------|-----------------------------------------------------------------------------------|
| SCHEMATIC |  |
| MODEL NO  | C                                                                                 |

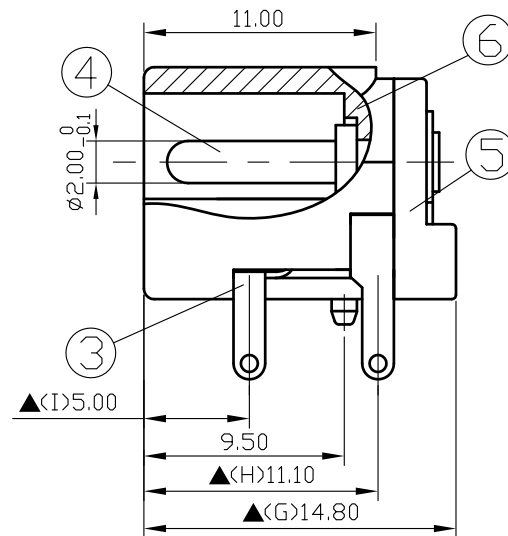

Pin Hole Layout  
(Jack Bottom View)

| 6.  | Housing          | PA9T                 | 1    | Black Color   |
|-----|------------------|----------------------|------|---------------|
| 5.  | Cover            | PA9T                 | 1    | Black Color   |
| 4.  | Pin(2.0 $\phi$ ) | Brass                | 1    | Nickel Plated |
| 3.  | Sleeve Spring    | 0.3T Phosphor Bronze | 1    | Silver Plated |
| 2.  | Pin Terminal     | 0.3T Brass           | 1    | Silver Plated |
| 1.  | Break Terminal   | 0.4T Brass           | 1    | Silver Plated |
| NO. | Description      | Material             | Q'TY | Finish        |

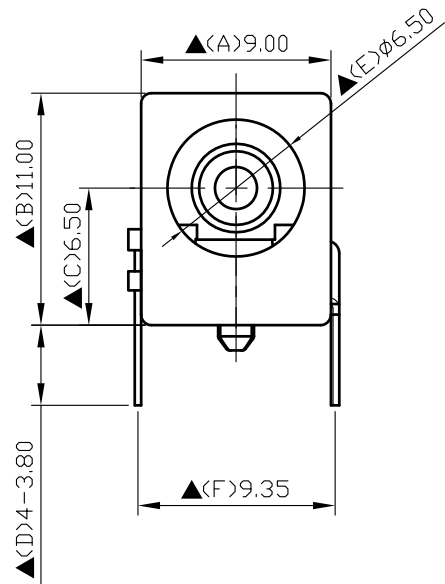

S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 10.11.2021 | 王平華 |      |      |         |

PART NAME :DC POWER JACK

PART NUMBER:SCD480CCS011B00G

VERSION:6.0

TOLERANCE : $\pm 0.3$ mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30m $\Omega$  max  
Current Rating : Max 5.0A , 24VDC  
Insulation Resistance : 100M $\Omega$  min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension

For Redference  
僅供參考

RoHS&SVHC  
Pb Free Process