

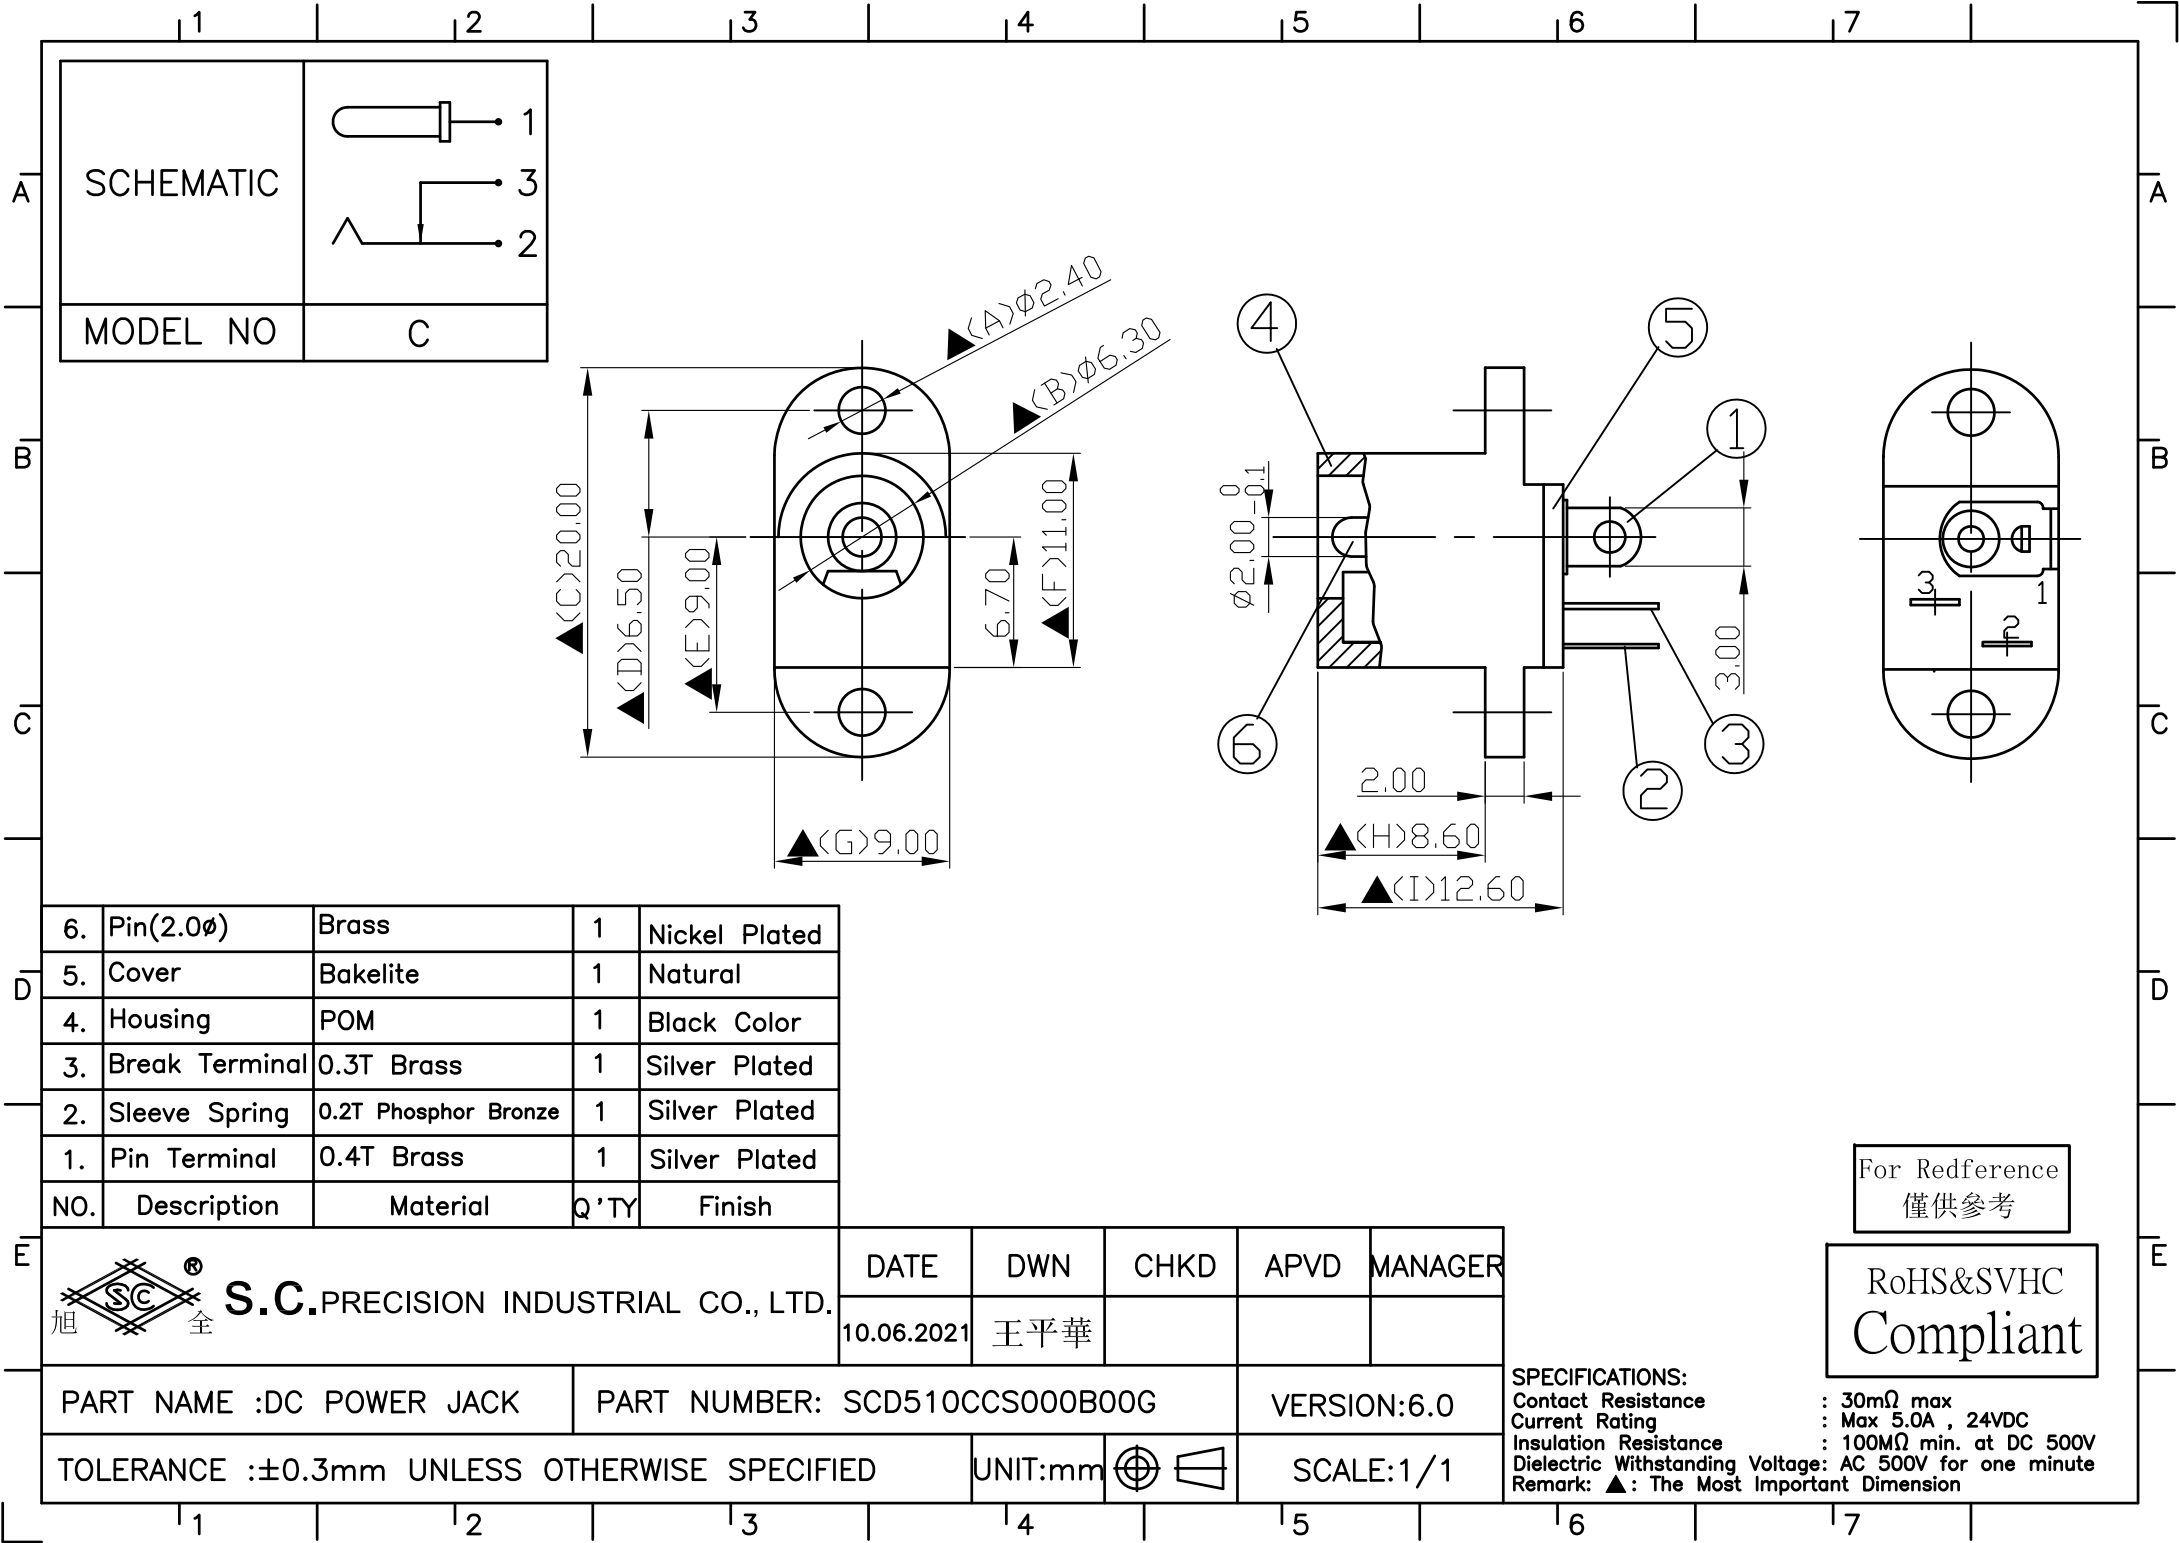
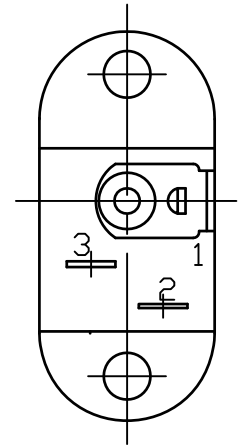


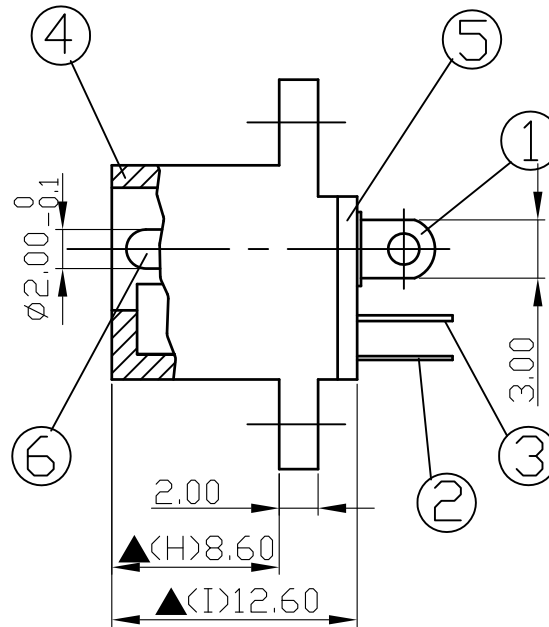

SCHEMATIC	
MODEL NO	C

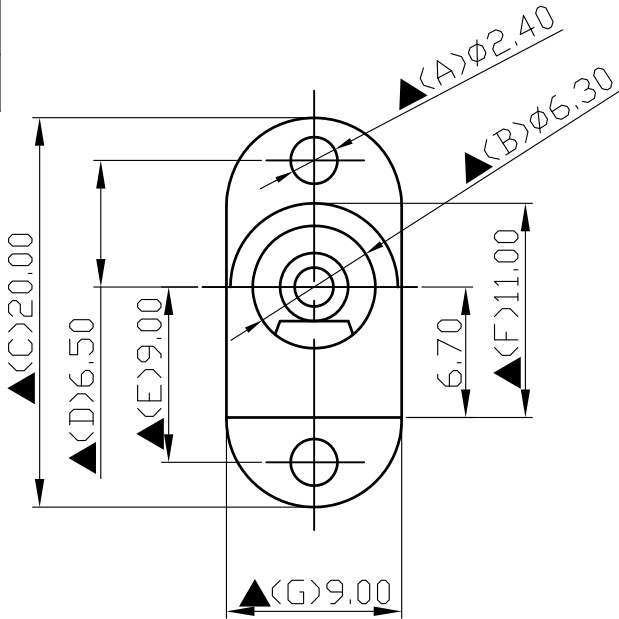

6.	Pin(2.0 ϕ)	Brass	1	Nickel Plated
5.	Cover	Bakelite	1	Natural
4.	Housing	POM	1	Black Color
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
		10.06.2021	王平華			

PART NAME :DC POWER JACK	PART NUMBER: SCD510CCS000B00G	VERSION:6.0
--------------------------	-------------------------------	-------------

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT:mm 	SCALE:1/1
---	---	-----------

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Current Rating : Max 5.0A , 24VDC
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant