


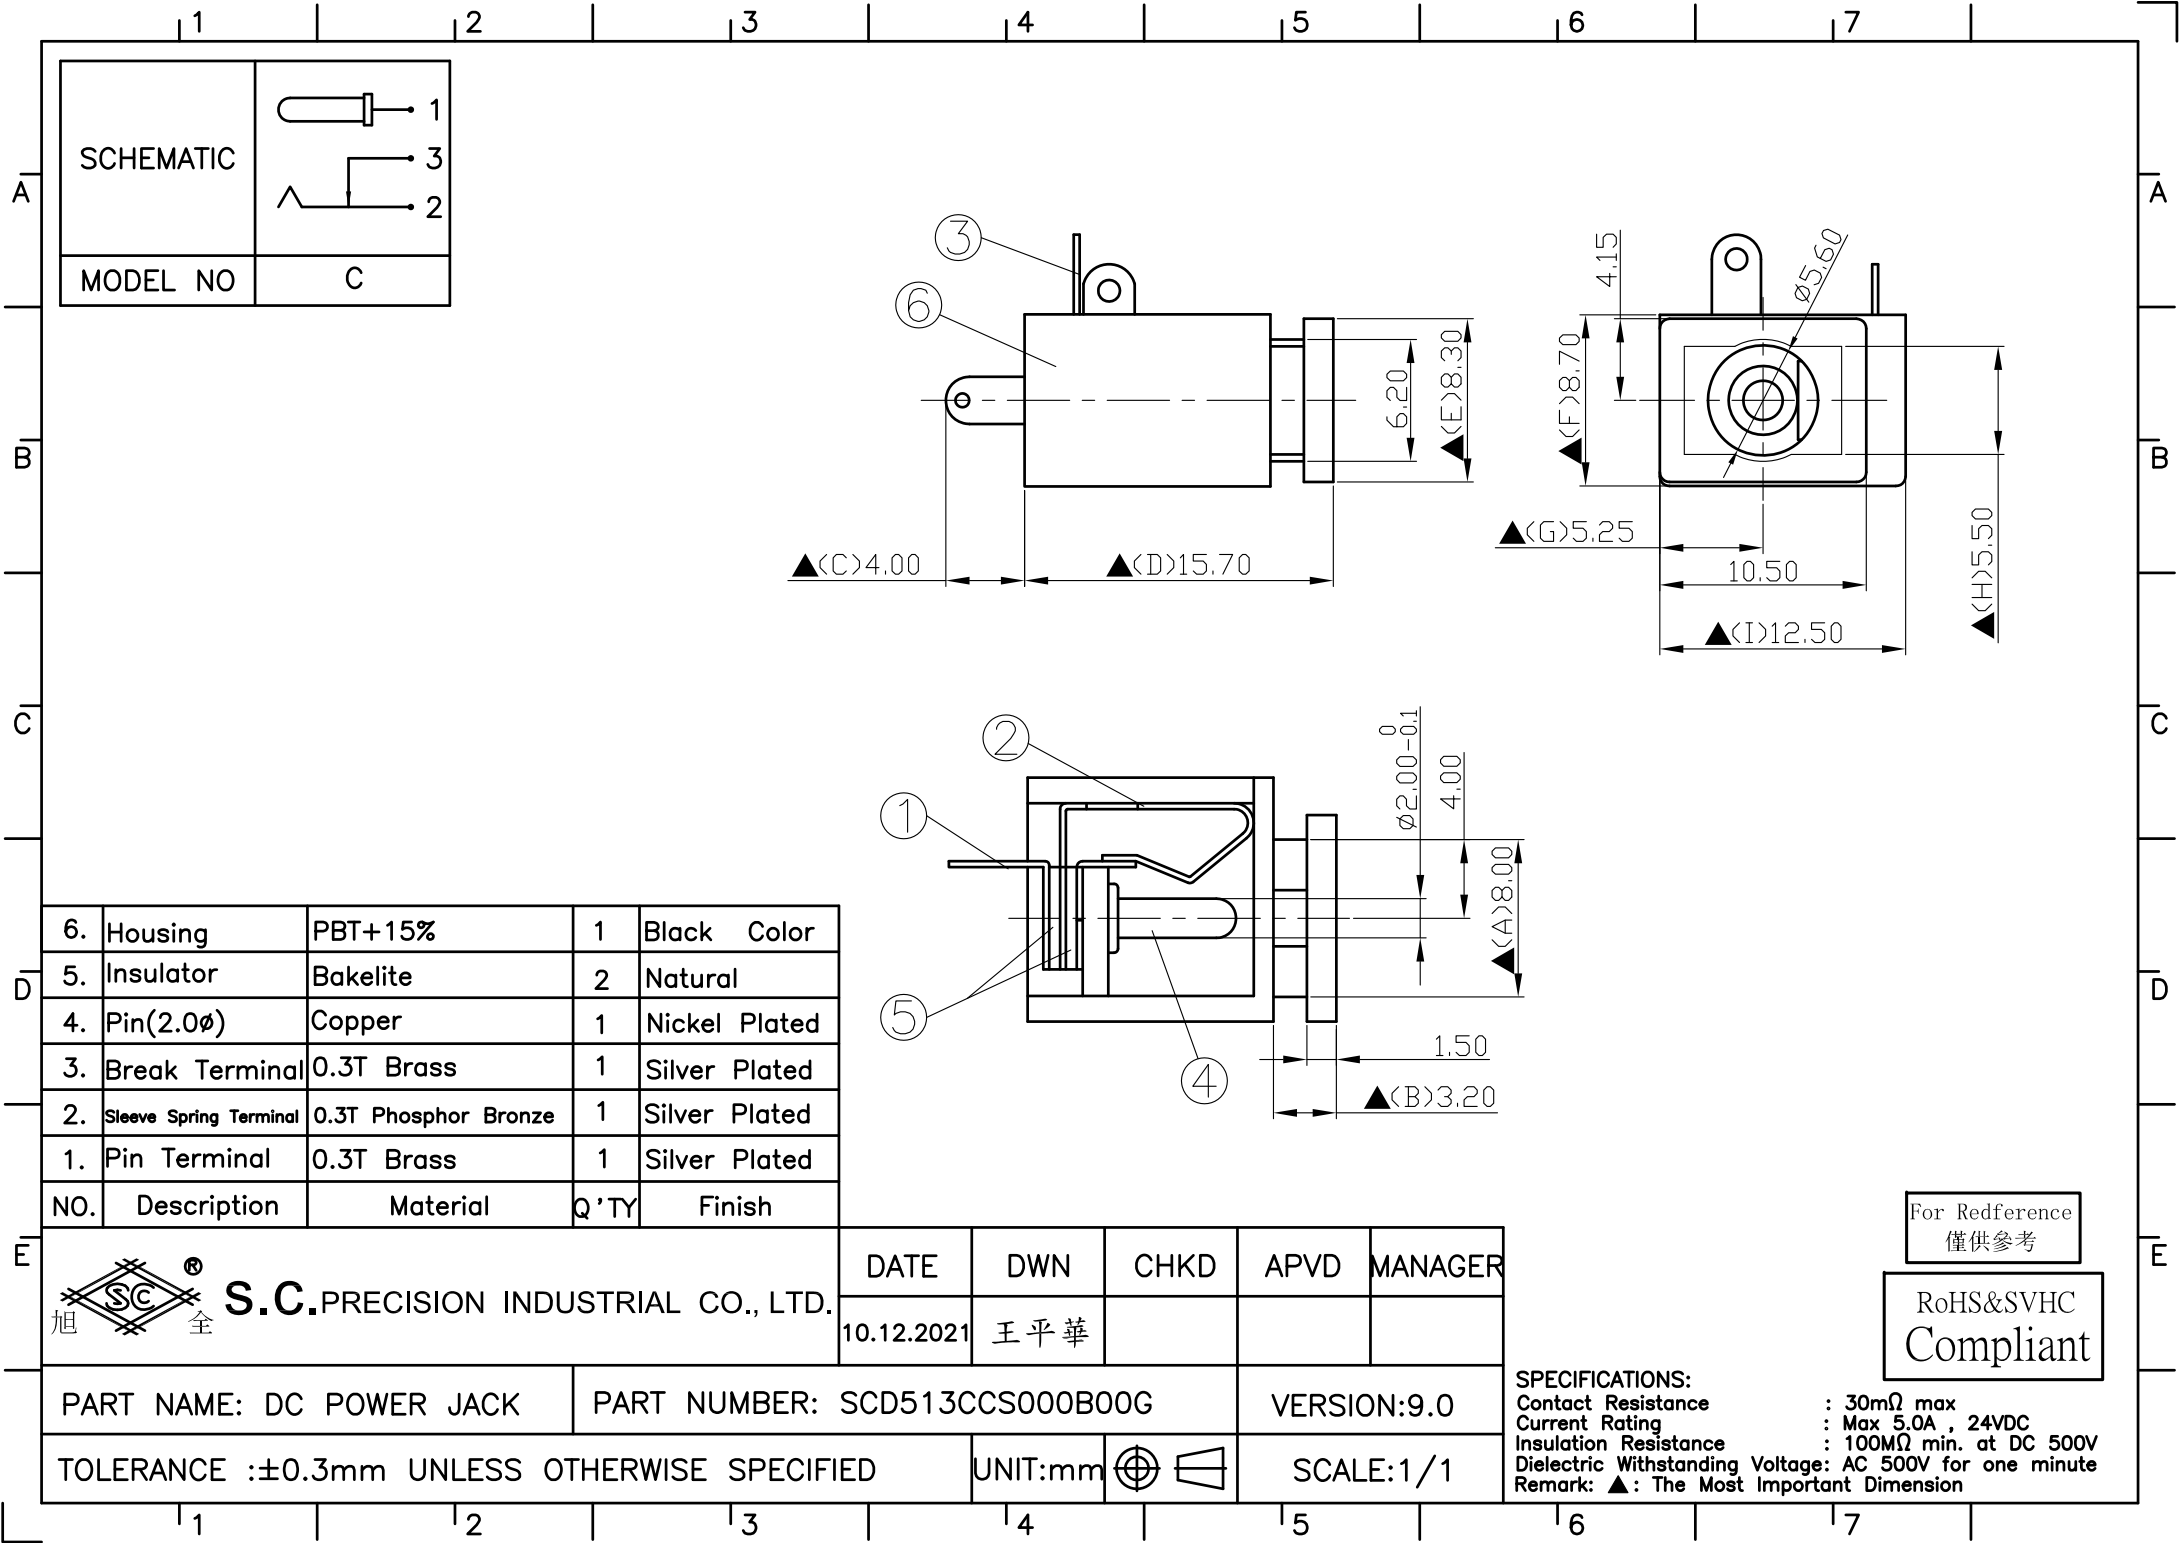

6.	Housing	PBT+15%	1	Black Color
5.	Insulator	Bakelite	2	Natural
4.	Pin(2.0 ϕ)	Copper	1	Nickel Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring Terminal	0.3T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
		10.12.2021	王平華			

PART NAME: DC POWER JACK		PART NUMBER: SCD513CCS000B00G			VERSION:9.0	
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED				UNIT:mm		SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Current Rating : Max 5.0A , 24VDC
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Rederence
僅供參考

RoHS&SVHC
Compliant