


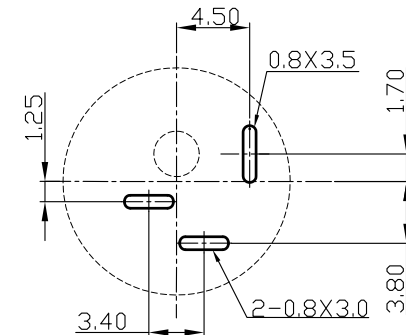
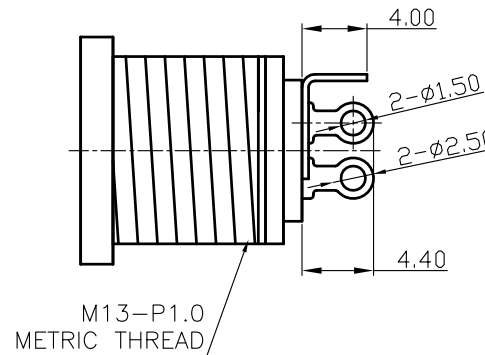

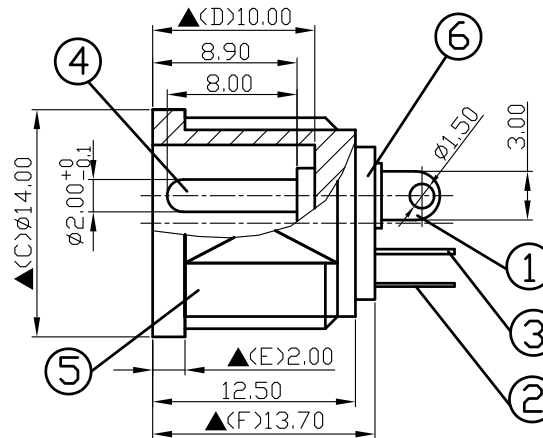


SCHEMATIC	
MODEL NO	C

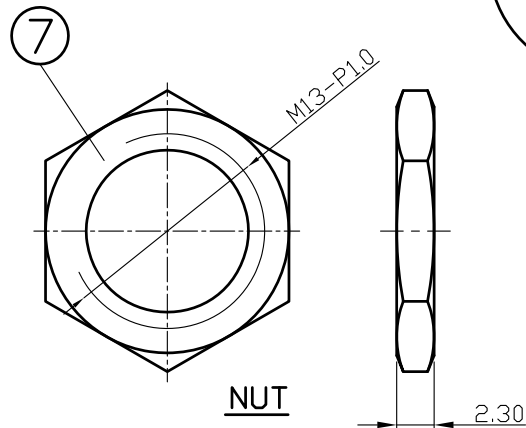

Pin Hole Layout
(Jack Bottom View)

7.	Nut	Low Lead Brass Rod	1	Nickel Plated
6.	Insulator	1.2T Bakelite	1	Natural
5.	Housing	PBT+30%	1	Black Color
4.	Pin(2.0 ϕ)	Brass	1	Nickel Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q' TY	Finish

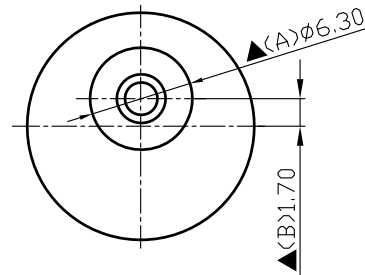

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.12.2021	王平華			

PART NAME : DC POWER JACK

PART NUMBER:SCD523CCS100B00L

VERSION:3.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Current Rating : Max 5.0A , 24VDC
Insulation Resistance: 100M Ω min. at DC 500V
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant