

A

B

C


D

E





SCHEMATIC

MODEL NO


D





M12XP1.0 METRIC THREAD

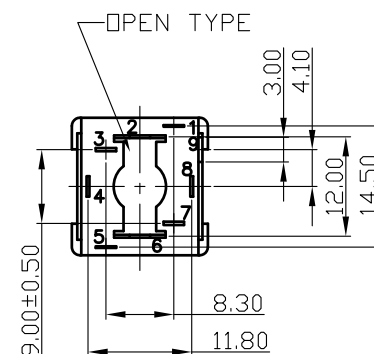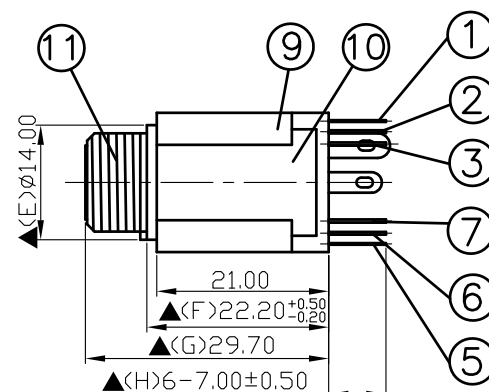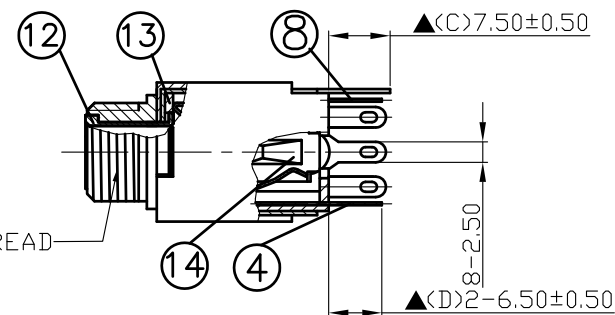


16.	Washer	0.5T Steel	1	Nickel Plated
15.	Nut	2.0T Steel	1	Nickel Plated
14.	Insulator	POM	2	Ivory Color
13.	Insulator	Red Vulcanited Fibre	1	Red Color
12.	Bushing	Low Lead Brass Rod	1	Nickel Plated
11.	Barrel(W/Thread)	POM	1	Black Color
10.	Cover	0.5T Steel	1	Nickel Plated
9.	Housing	POM	1	Black Color
8.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.4T Brass	1	Silver Plated
6.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
5.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
4.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Transfer Terminal	0.4T Brass	1	Silver Plated
2.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q' TY	Finish



WASHER



NUT



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
08.19.2021	王平華			


PART NAME :6.3ø PHONE JACK

PART NUMBER:SCJ610R3NDS1B11L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Compliant