

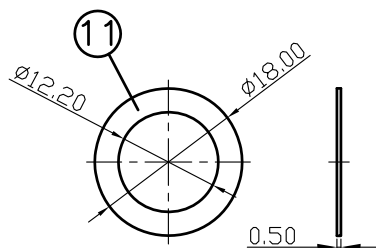





NUT

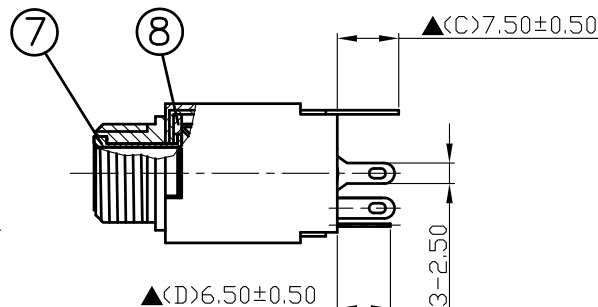

WASHER

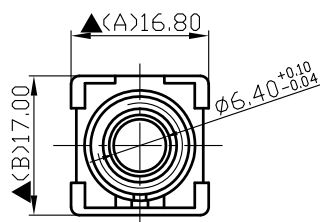

M12XP1.0 METRIC THREAD

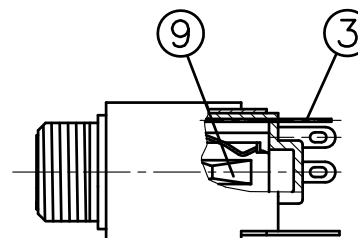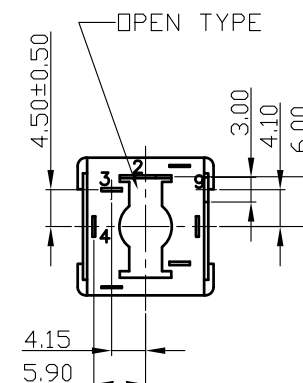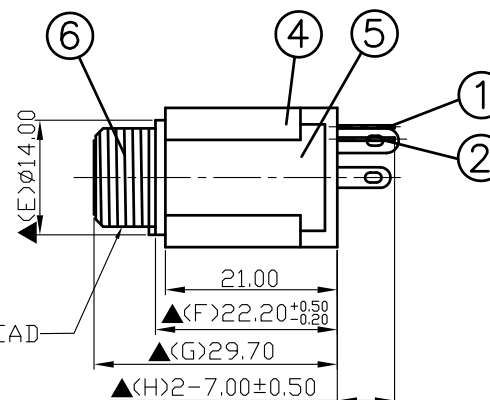

| 11. | Washer            | 0.5T Steel            | 1    | Nickel Plated |
|-----|-------------------|-----------------------|------|---------------|
| 10. | Nut               | 2.0T Steel            | 1    | Nickel Plated |
| 9.  | Insulator         | POM                   | 1    | Ivory Color   |
| 8.  | Insulator         | Red Vulcanited Fibre  | 1    | Red Color     |
| 7.  | Bushing           | Low Lead Brass Rod    | 1    | Nickel Plated |
| 6.  | Barrel(W/Thread)  | POM                   | 1    | Black Color   |
| 5.  | Cover             | 0.5T Steel            | 1    | Nickel Plated |
| 4.  | Housing           | POM                   | 1    | Black Color   |
| 3.  | Tip Spring        | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 2.  | Transfer Terminal | 0.4T Brass            | 1    | Silver Plated |
| 1.  | Break Terminal    | 0.35T Phosphor Bronze | 1    | Silver Plated |
| NO. | Description       | Material              | Q'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 08.19.2021 | 王平華 |      |      |         |

PART NAME : 6.3φ PHONE JACK

PART NUMBER: SCJ610R3NGS1B11L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

For Redference  
 僅供參考

RoHS&SVHC  
 Compliant