
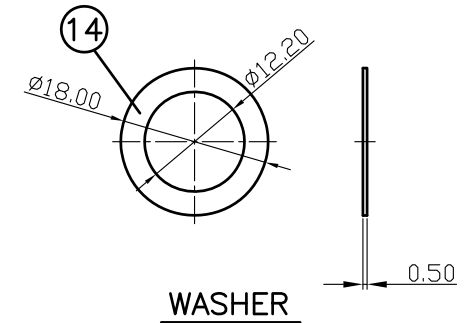
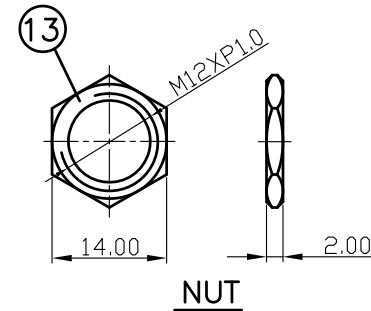
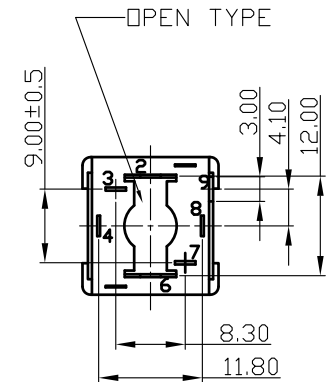
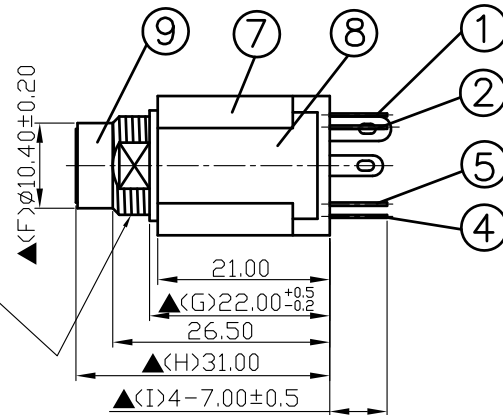


M12XP1.0 METRIC THREAD

14.	Washer	0.5T Steel	1	Nickel Plated
13.	Nut	2.0T Steel	1	Nickel Plated
12.	Insulator	POM	2	Ivory Color
11.	Insulator	Red Vulcanited Fibre	1	Red Color
10.	Bushing	Low Lead Brass Rod	1	Nickel Plated
9.	Barrel(W/Thread)	POM	1	Black Color
8.	Cover	0.5T Steel	1	Nickel Plated
7.	Housing	POM	1	Black Color
6.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
5.	Transfer Terminal	0.4T Brass	1	Silver Plated
4.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

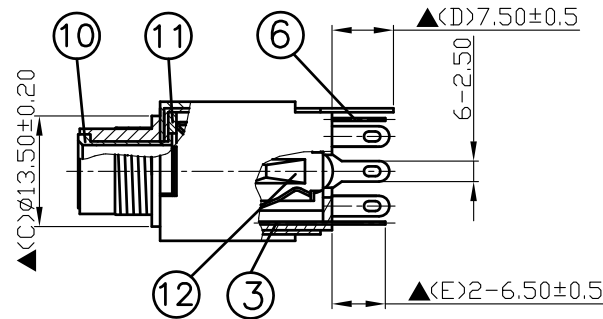

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
08.17.2021	王平華			

For Redference
僅供參考

RoHS&SVHC
Compliant

PART NAME : 6.3 ϕ PHONE JACK

PART NUMBER: SCJ610R0NCS1B11L

VERSION: 2.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension