

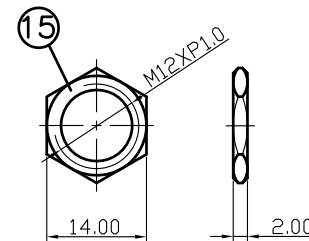

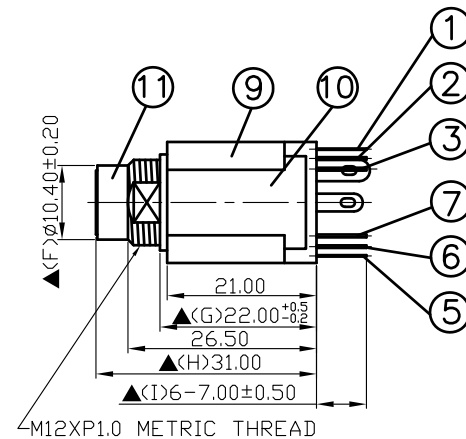
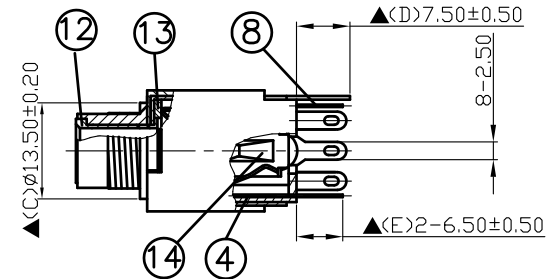


16.	Washer	0.5T Steel	1	Nickel Plated
15.	Nut	2.0T Steel	1	Nickel Plated
14.	Insulator	POM	2	Ivory Color
13.	Insulator	Red Vulcanited Fibre	1	Red Color
12.	Bushing	Low Lead Brass Rod	1	Nickel Plated
11.	Barrel(W/Thread)	POM	1	Black Color
10.	Cover	0.5T Steel	1	Nickel Plated
9.	Housing	POM	1	Black Color
8.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.4T Brass	1	Silver Plated
6.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
5.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
4.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Transfer Terminal	0.4T Brass	1	Silver Plated
2.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



NUT

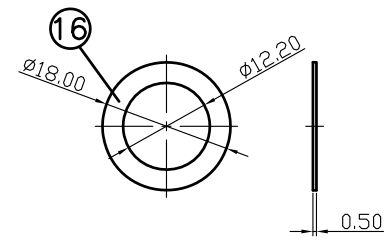

WASHER

 S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	08.17.2021	王平華			

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ610R0NDS1B11L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Reference
 僅供參考

RoHS&SVHC
 Compliant