

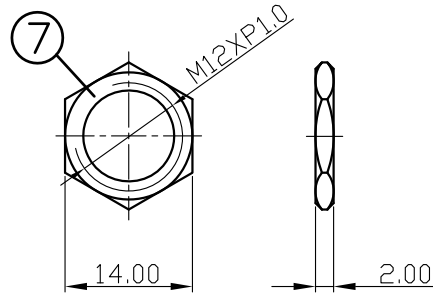




WASHER

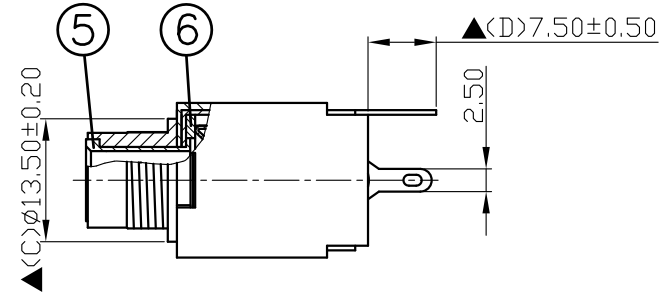

NUT

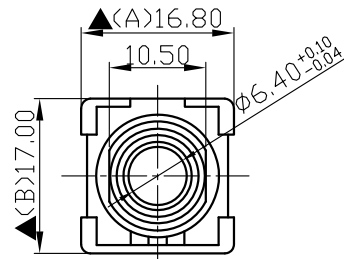

M12XP1.0 METRIC THREAD

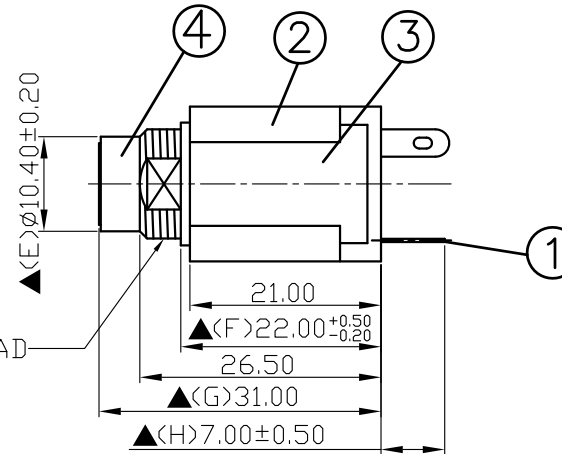

| 8.  | Washer           | 0.5T Steel            | 1     | Nickel Plated |
|-----|------------------|-----------------------|-------|---------------|
| 7.  | Nut              | 2.0T Steel            | 1     | Nickel Plated |
| 6.  | Insulator        | Red Vulcanited Fibre  | 1     | Red Color     |
| 5.  | Bushing          | Low Lead Brass Rod    | 1     | Nickel Plated |
| 4.  | Barrel(W/Thread) | POM                   | 1     | Black Color   |
| 3.  | Cover            | 0.5T Steel            | 1     | Nickel Plated |
| 2.  | Housing          | POM                   | 1     | Black Color   |
| 1.  | Tip Spring       | 0.35T Phosphor Bronze | 1     | Silver Plated |
| NO. | Description      | Material              | Q 'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 08.17.2021 | 王平華 |      |      |         |

PART NAME : 6.3φ PHONE JACK

PART NUMBER: SCJ610RONIS1B11L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

For Redference  
 僅供參考

RoHS&SVHC  
 Compliant