

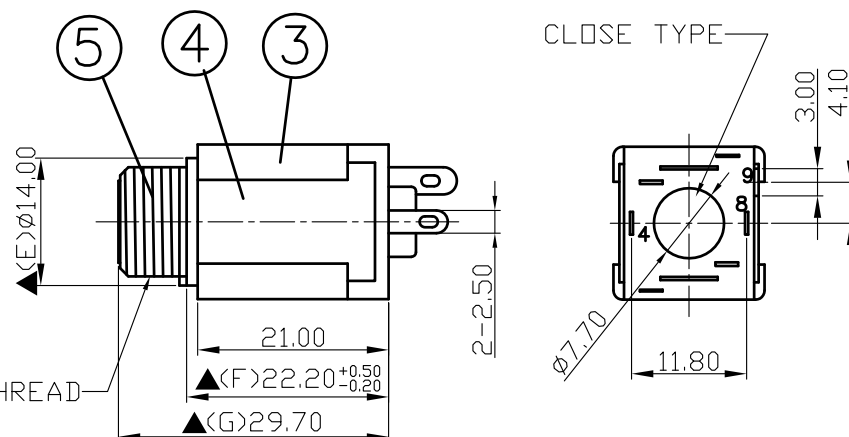
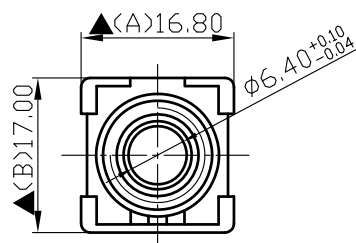
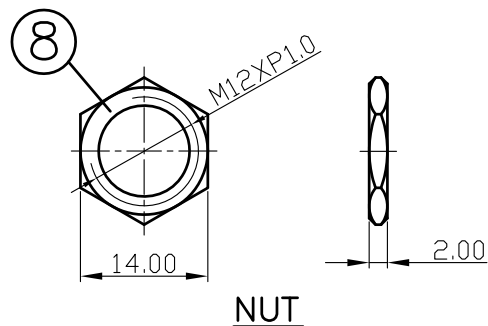
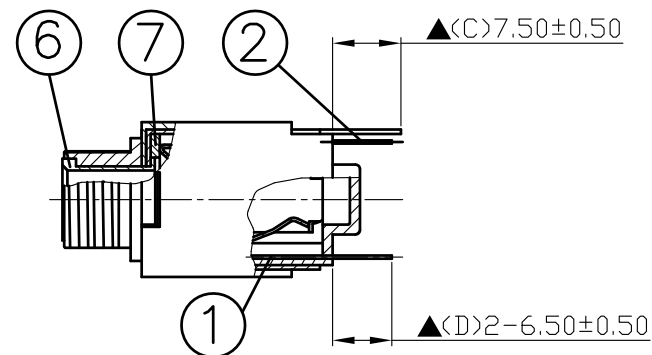


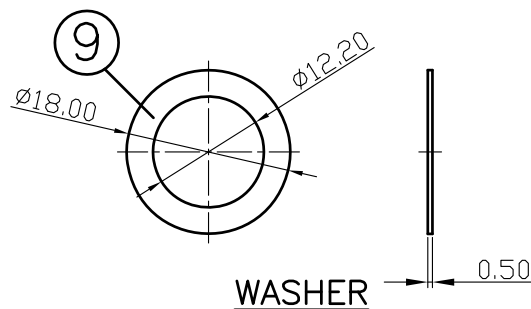

| 9.  | Washer           | 0.5T Steel            | 1    | Nickel Plated |
|-----|------------------|-----------------------|------|---------------|
| 8.  | Nut              | 2.0T Steel            | 1    | Nickel Plated |
| 7.  | Insulator        | Red Vulcanited Fibre  | 1    | Red Color     |
| 6.  | Bushing          | Low Lead Brass Rod    | 1    | Nickel Plated |
| 5.  | Barrel(W/Thread) | POM                   | 1    | Black Color   |
| 4.  | Cover            | 0.5T Steel            | 1    | Nickel Plated |
| 3.  | Housing          | POM                   | 1    | Black Color   |
| 2.  | Ring Spring      | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Tip Spring       | 0.35T Phosphor Bronze | 1    | Silver Plated |
| NO. | Description      | Material              | Q'TY | Finish        |

M12XP1.0 METRIC THREAD

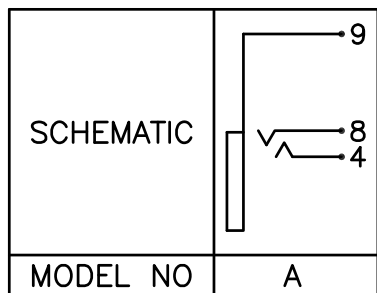

S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 08.19.2021 | 王平華 |      |      |         |

For Redference  
僅供參考

RoHS&SVHC  
Compliant

PART NAME :6.3φ PHONE JACK

PART NUMBER:SCJ610R3NAS1B21L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension