




SCHEMATIC	9 8 4 3 2
MODEL NO	B

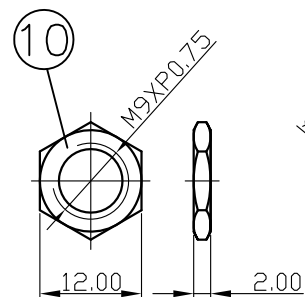

NUT

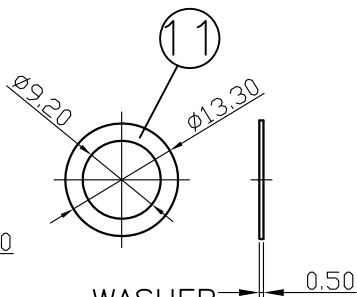

WASHER



11.	Washer	0.5T Steel	1	Nickel Plated
10.	Nut	2.0T Steel	1	Nickel Plated
9.	Insulator	POM	1	Ivory Color
8.	Insulator	Red Vulcanited Fibre	1	Red Color
7.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
6.	Cover	0.5T Steel	1	Nickel Plated
5.	Housing	POM	1	Black Color
4.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q' TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
08.10.2021	王平華			

PART NAME : 6.3Φ PHONE JACK

PART NUMBER: SCJ610M2NBS3B11L

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED


UNIT: mm

SCALE: 1/1




SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

M9XP0.75
METRIC THREAD

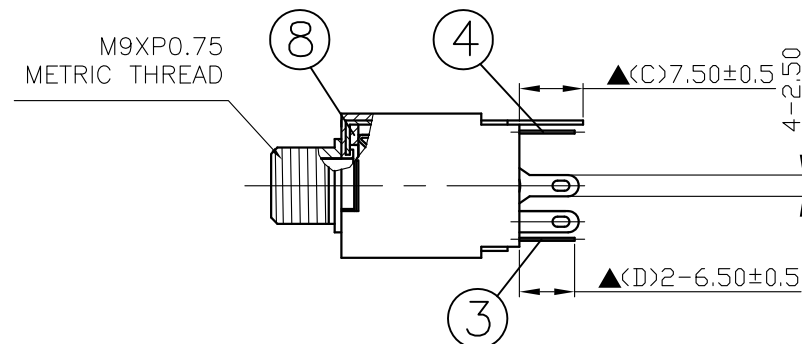

W/O STOPPER

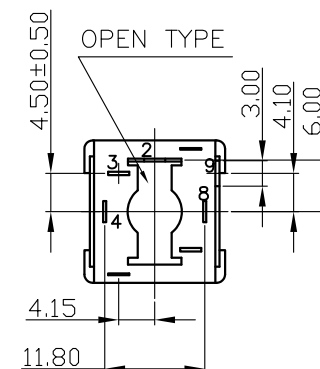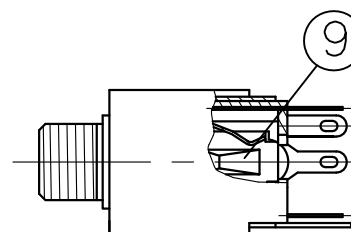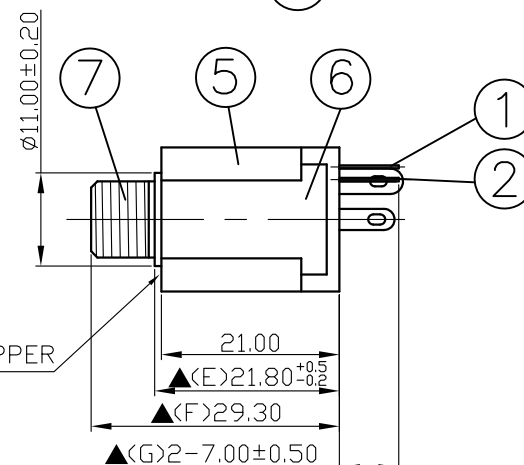

For Redference
僅供參考

RoHS&SVHC
Compliant