




A

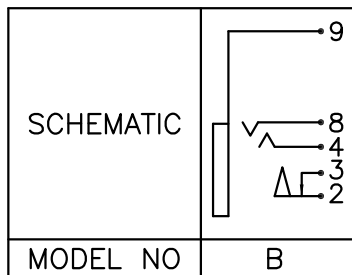



B

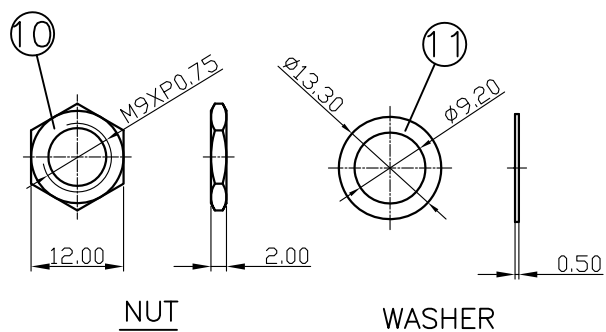


C



M9XP0.75 METRIC THREAD
WITH STOPPER

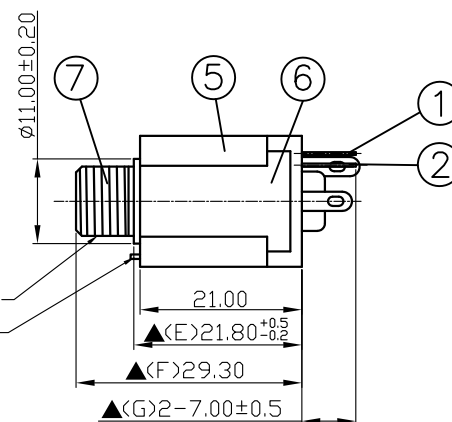

D



A

B

C

D

E

11.	Washer	0.5T Steel	1	Nickel Plated
10.	Nut	2.0T Steel	1	Nickel Plated
9.	Insulator	POM	1	Ivory Color
8.	Insulator	Red Vulcanited Fibre	1	Red Color
7.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
6.	Cover	0.5T Steel	1	Nickel Plated
5.	Housing	POM	1	Black Color
4.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
08.17.2021	王平華			


PART NAME : 6.3Ø PHONE JACK

PART NUMBER:SCJ610M2NBS3B22L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension