



A

B

C


D

E

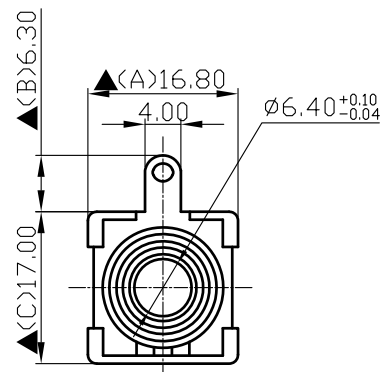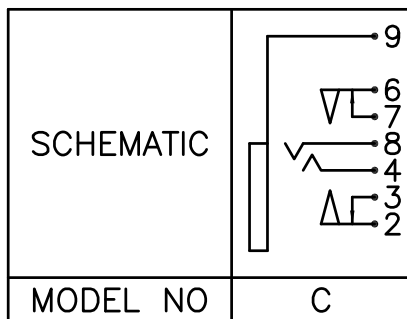


14	Washer	0.5T Steel	1	Nickel Plated
13	Nut	2.0T Steel	1	Nickel Plated
12	Insulator	POM	2	Ivory Color
11	Insulator	Red Vulcanited Fibre	1	Red Color
10	Bushing	Low Lead Brass Rod	1	Nickel Plated
9	Barre(W/Thread)	POM	1	Black Color
8	Cover	0.5T Steel	1	Nickel Plated
7	Housing	POM	1	Black Color
6	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
5	Transfer Terminal	0.4T Brass	1	Silver Plated
4	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
3	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2	Transfer Terminal	0.4T Brass	1	Silver Plated
1	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish




M12XP1.0
METRIC THREAD

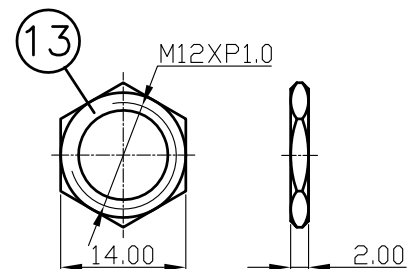

NUT

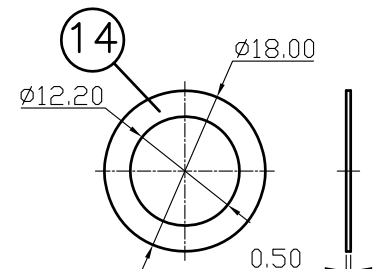

WASHER

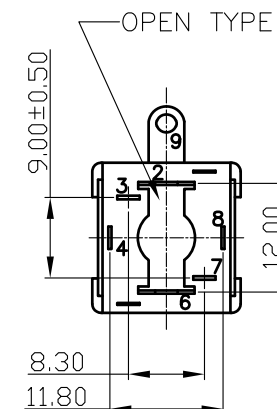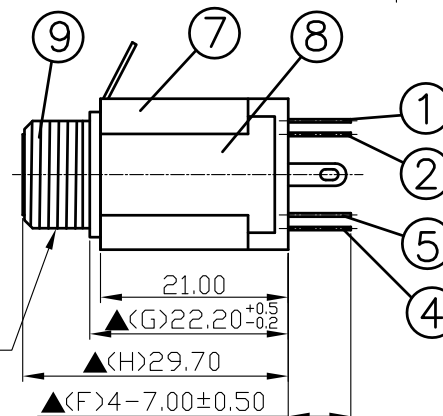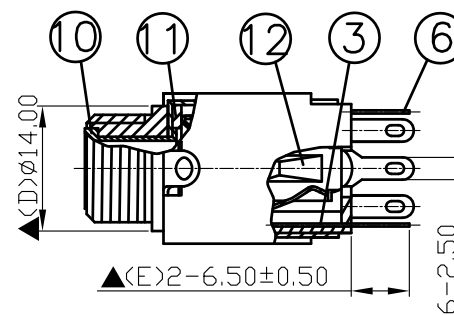

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.28.2021	王平華			

For Redference
僅供參考

RoHS&SVHC
Compliant


PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ618R3NCS1B11L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension