



A
B
C
D
E

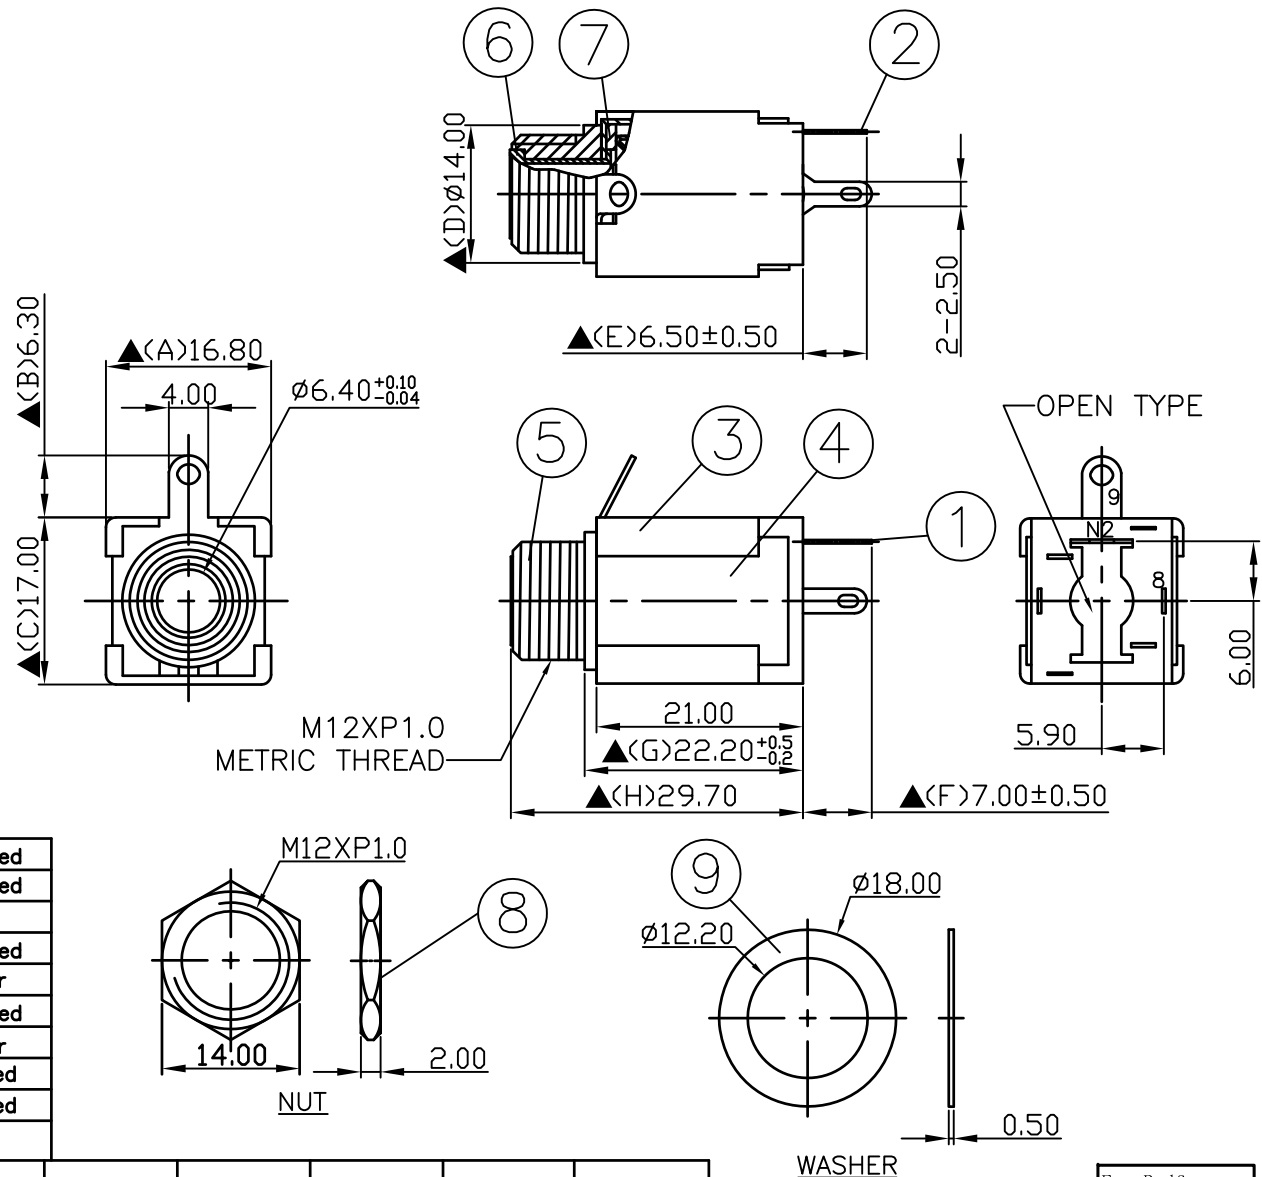

9	Washer	0.5T Steel	1	Nickel Plated
8	Nut	2.0T Steel	1	Nickel Plated
7	Insulator	Red Vulcanite Fibre	1	Red Color
6	Bushing	Low Lead Brass Rod	1	Nickel Plated
5	Barre(W/Thread)	POM	1	Black Color
4	Cover	0.5T Steel	1	Nickel Plated
3	Housing	POM	1	Black Color
2	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
1	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

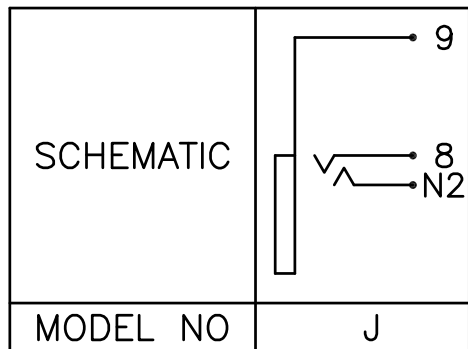

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.28.2021	王平華			

PART NAME : 6.3 ϕ PHONE JACK

PART NUMBER: SCJ618R3NJS1B11L

VERSION: 1.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant